


MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	415	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8114	PAGE	10-C
	APPR BY		DATE	

R A T I N G	FRAME	6 INCH SUB	HP	5
	MODEL	236610	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

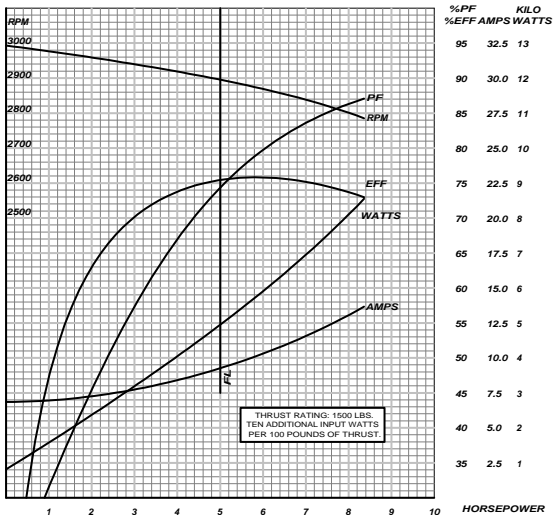

FULL LOAD TORQUE	9.1	LB-FT
BREAKDOWN TORQUE	25.4	LB-FT
LOCKED ROTOR TORQUE	15.1	LB-FT
LOCKED ROTOR AMPS	43.1	