


MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8123	PAGE	1-M
	APPR BY		DATE	

R A T I N G	FRAME	6 INCH SUB	HP	10
	MODEL	236612	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TEST IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

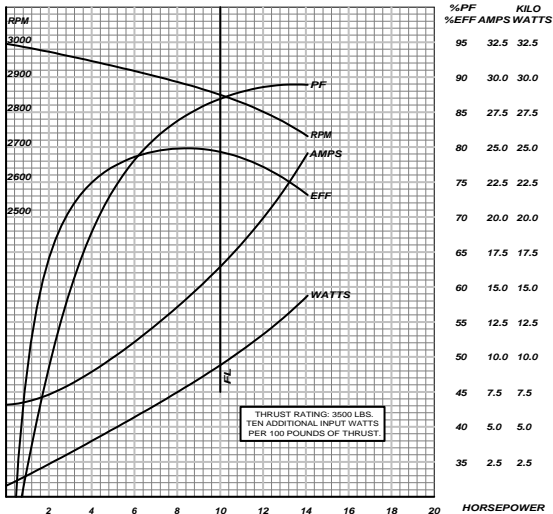

FULL LOAD TORQUE	18.4	LB-FT
BREAKDOWN TORQUE	39.2	LB-FT
LOCKED ROTOR TORQUE	31.7	LB-FT
LOCKED ROTOR AMPS	83.0	

THRUST RATING: 3500 LBS.
TEN ADDITIONAL INPUT WATTS
PER 100 POUNDS OF THRUST.