


MOTOR PERFORMANCE CHARACTERISTICS

| | | | | |
|----------------------------|---------|-----|---------|----|
| T E S T | VOLTS | 415 | HERTZ | 50 |
| | ST.MFD | | RUN MFD | |
| | TEST PR | | PAGE | |
| | APPR BY | | DATE | |

| | | | | |
|--|-------|------------|-------|---------|
| R A T I N G | FRAME | 6 INCH SUB | HP | 15 |
| | MODEL | 236613 | VOLTS | 380-415 |
| | RPM | 2875 | PHASE | 3 |
| | S.F. | 1.00 | HERTZ | 50 |
| | TYPE | 3 PHASE | | |

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
COMPUTER GENERATED PERFORMANCE. NOT FROM TEST.

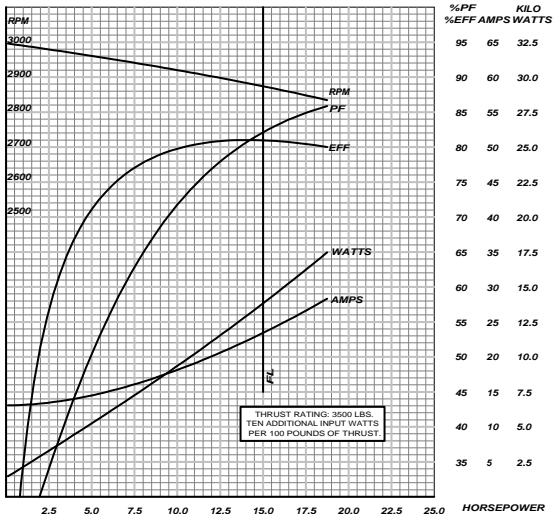

| | | |
|---------------------|------|-------|
| FULL LOAD TORQUE | 27.4 | LB-FT |
| BREAKDOWN TORQUE | 75.0 | LB-FT |
| LOCKED ROTOR TORQUE | 62.5 | LB-FT |
| LOCKED ROTOR AMPS | 133 | |