




## MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	400	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8124	PAGE	30-H
	APPR BY		DATE	

RATING	FRAME	6 INCH SUB	HP	15
	MODEL	236613	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

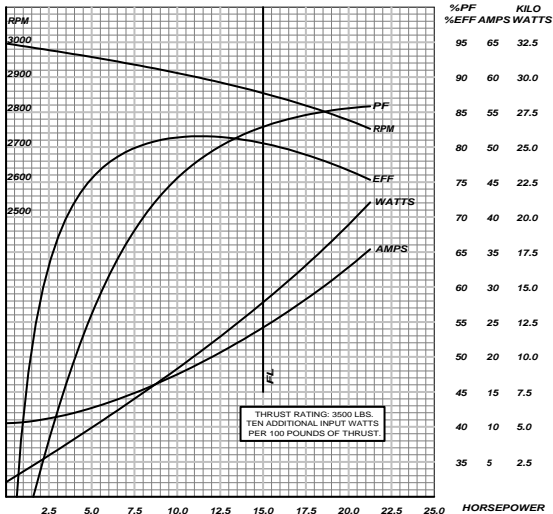

FULL LOAD TORQUE	27.6	LB-FT
BREAKDOWN TORQUE	62.3	LB-FT
LOCKED ROTOR TORQUE	49.8	LB-FT
LOCKED ROTOR AMPS	125	

CURVE NO. 336330-751