


## MOTOR PERFORMANCE CHARACTERISTICS

<b>T E S T</b>	VOLTS	400	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8118	PAGE	19-1
	APPR BY		DATE	

<b>R A T I N G</b>	FRAME	6 INCH SUB	HP	20
	MODEL	236614	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

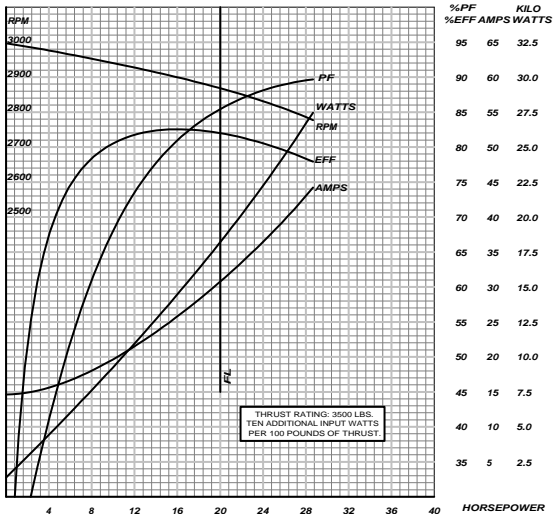

FULL LOAD TORQUE	36.6	LB-FT
BREAKDOWN TORQUE	98.1	LB-FT
LOCKED ROTOR TORQUE	76.4	LB-FT
LOCKED ROTOR AMPS	172	