


## MOTOR PERFORMANCE CHARACTERISTICS

<b>T E S T</b>	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8121	PAGE	36-I
	APPR BY		DATE	

<b>R A T I N G</b>	FRAME	6 INCH SUB	HP	30
	MODEL	236616	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

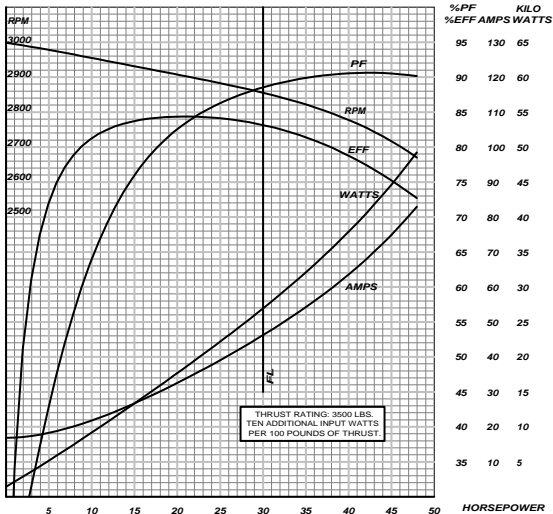

FULL LOAD TORQUE	55.2	LB-FT
BREAKDOWN TORQUE	131	LB-FT
LOCKED ROTOR TORQUE	112	LB-FT
LOCKED ROTOR AMPS	236	