


MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	415	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8113	PAGE	30-N
	APPR BY		DATE	

RATING	FRAME	6 INCH SUB	HP	40
	MODEL	236617	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

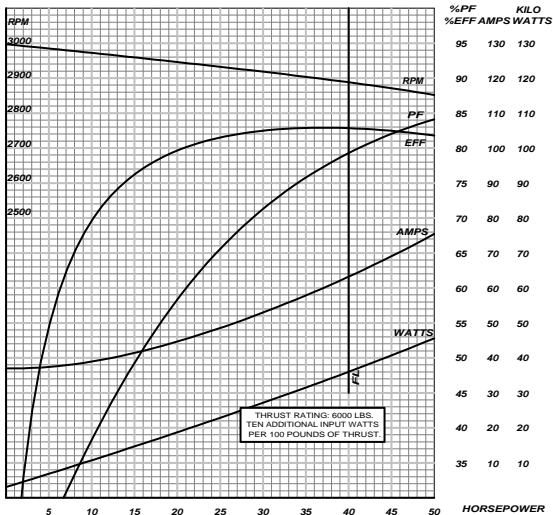

FULL LOAD TORQUE	72.7	LB-FT
BREAKDOWN TORQUE	233	LB-FT
LOCKED ROTOR TORQUE	203	LB-FT
LOCKED ROTOR AMPS	397	