




MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	400	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8113	PAGE	30-M
	APPR BY		DATE	

R A T I N G	FRAME	6 INCH SUB	HP	40
	MODEL	236617	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

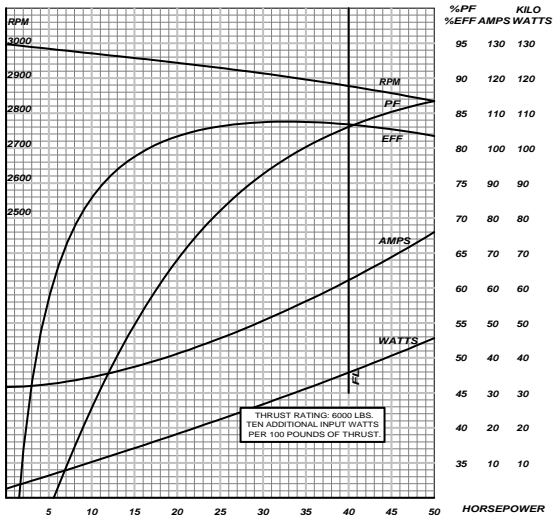

FULL LOAD TORQUE	73.0	LB-FT
BREAKDOWN TORQUE	216	LB-FT
LOCKED ROTOR TORQUE	187	LB-FT
LOCKED ROTOR AMPS	382	

CURVE NO. 336334-751