


MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	415	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR		PAGE	
	APPR BY		DATE	

RATING	FRAME	6 INCH SUB	HP	60
	MODEL	276699	VOLTS	415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS:

COMPUTER GENERATED PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

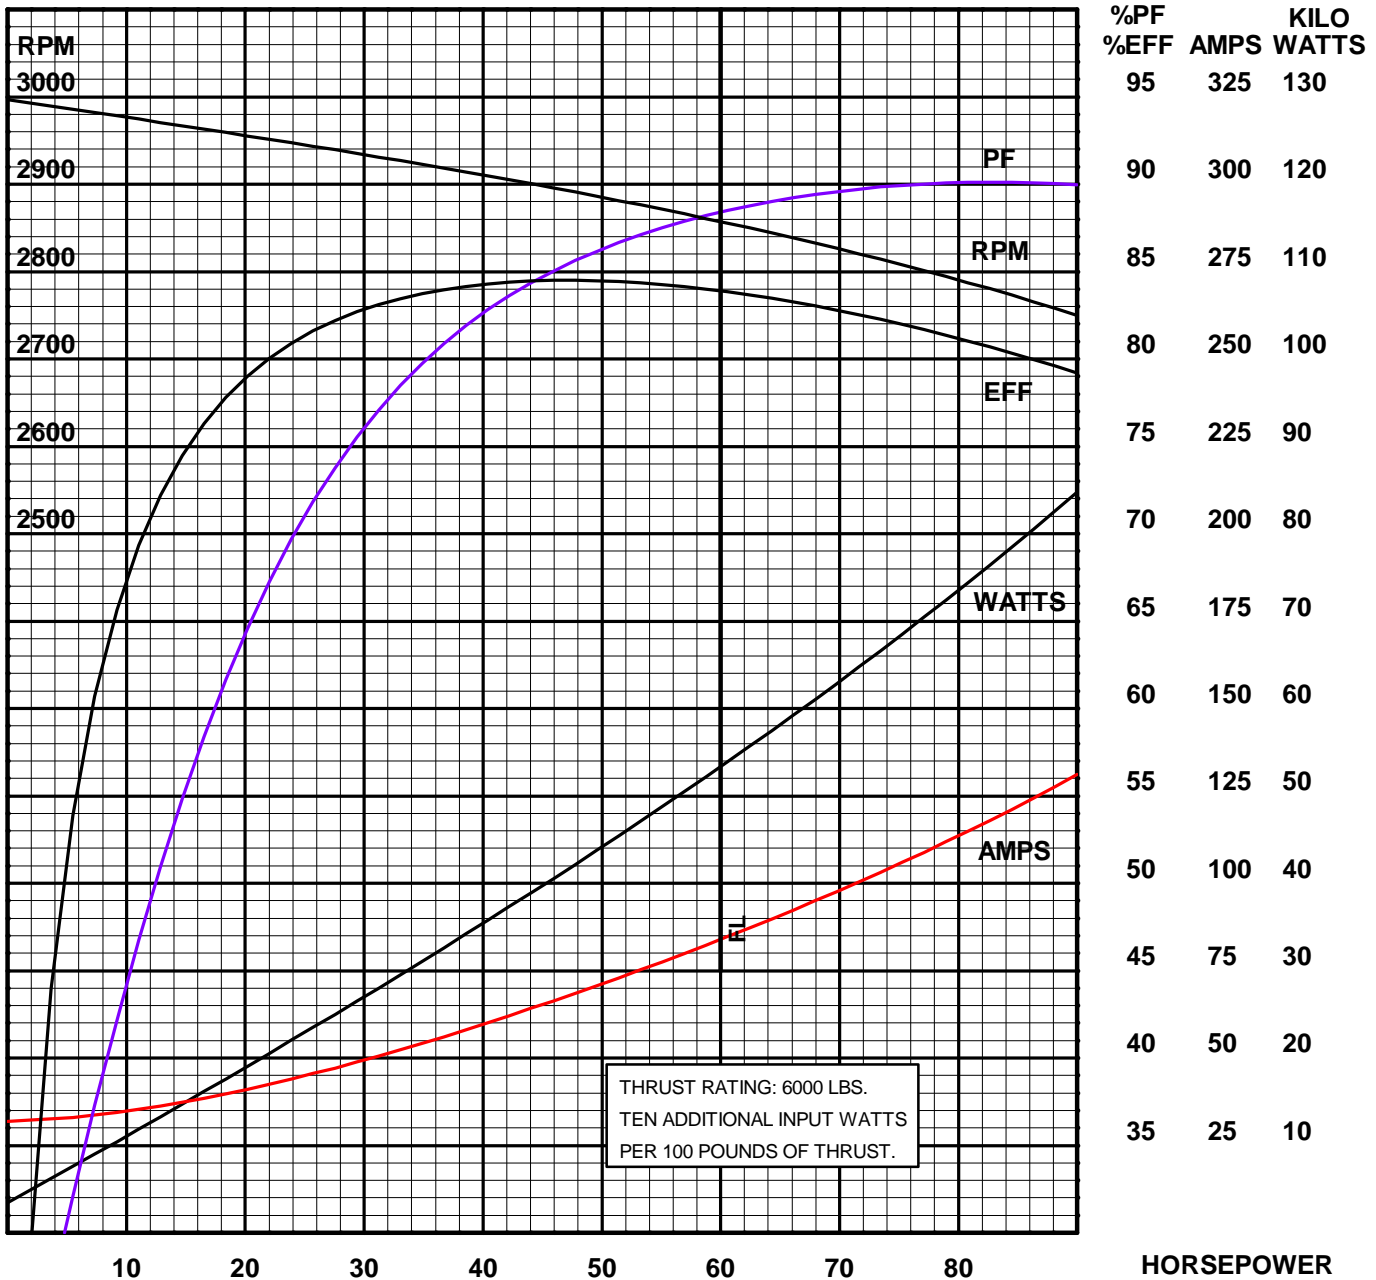

FULL LOAD TORQUE	110	LB-FT
BREAKDOWN TORQUE	256	LB-FT
LOCKED ROTOR TORQUE	206	LB-FT
LOCKED ROTOR AMPS	432	