


PRESSURE COMPENSATED DRIPPERLINE BIOLINE

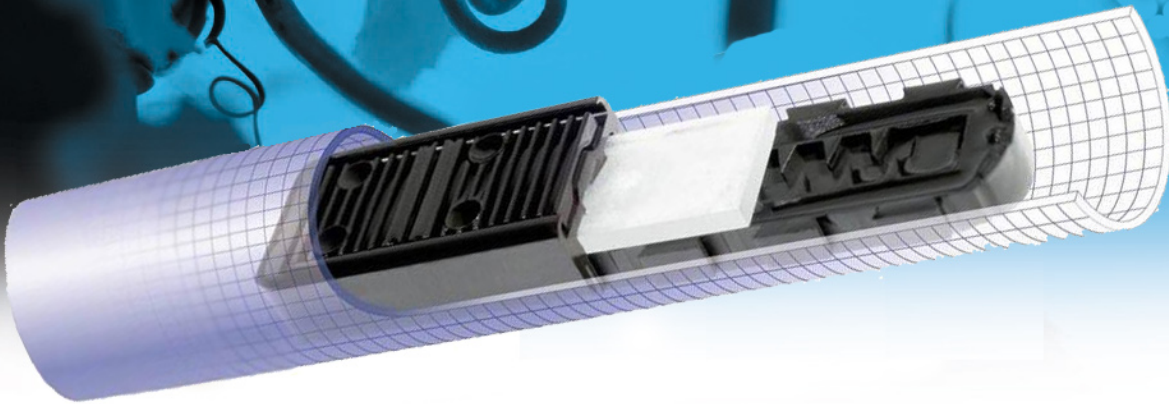

	WALLTHICKNESS	FLOW RATE	PRESSURE	DIAMETER	
	(mm)	(l/h)	(m)	I.D.	O.D.
BIOLINE 17 CNL	1.0	1.6 & 2.3	10 - 40	14.4	17

Ideally suited for waste-water dispersal system

BIOLINE Features:

- Anti-vacuum mechanism
- Non-leakage (CNL) mechanism
- Eliminates drainage and refill effect
- Highest efficiency for pulse irrigation
- Continuous self-flushing mechanism
- Ideal for subsurface irrigation
- Prevents sucking of dirt into the dripperline
- Anti-sand feature, preventing sand sediments entry into dripper water passages
- Double labyrinth with the largest passages - based on patented Turbonet technology
- Unique super effective clog resistance
- Root intrusion barrier
- Maintains uniform flow rate over pressure range of 5 m - 40 m
- Improved inlet filter with patented rack design
- Wide compensating range
- Fully purple dripline



Your Agent:

HEAD OFFICE:
PH: 03 9369 8777
FAX: 03 9369 3865

