




MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	400	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8737	PAGE	1
	APPR BY		DATE	

R A T I O N G	FRAME	6" RW	kW	22
	MODEL	262716	VOLTS	380-415
	RPM	2900	PHASE	3
	S.F.	1	HERTZ	50
	TYPE	3 PHASE		

REMARKS:

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE
RUNNING IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

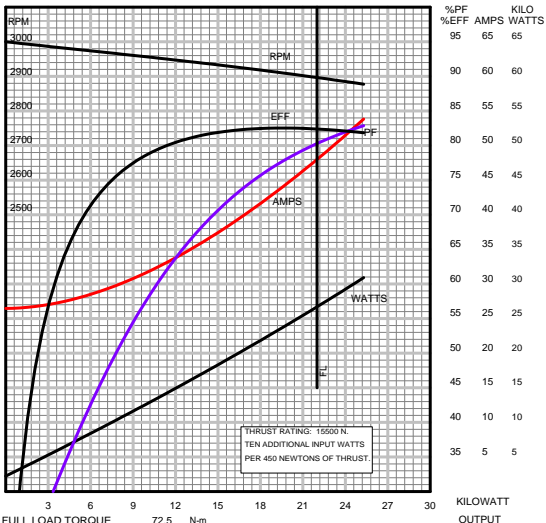

FULL LOAD TORQUE	72.5	N-m
BREAKDOWN TORQUE	178	N-m
LOCKED ROTOR TORQUE	102	N-m
LOCKED ROTOR AMPS	231	

CURVE NO. 326370-702