



MOTOR PERFORMANCE CHARACTERISTICS


T E S T	VOLTS	400	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8748	PAGE	1
	APPR BY		DATE	

R A T I N G	FRAME	6" RW	kW	13
	MODEL	262232	VOLTS	380-415
	RPM	2890	PHASE	3
	S.F.	1	HERTZ	50
	TYPE	3 PHASE		

REMARKS:

RUNNING IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE

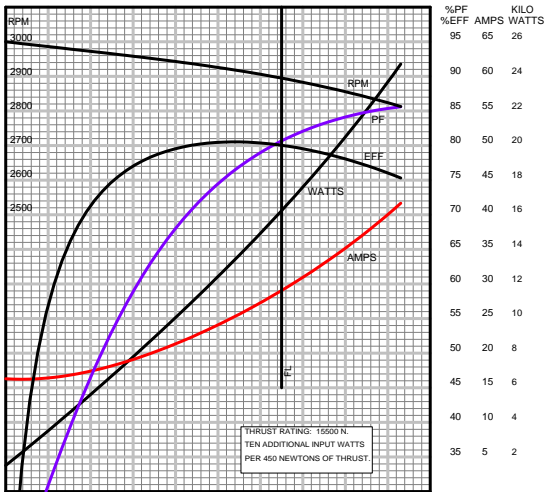

THRUST RATING: 15500 N.
TEN ADDITIONAL INPUT WATTS
PER 450 NEWTONS OF THRUST.

FULL LOAD TORQUE	42.8	N-m
BREAKDOWN TORQUE	94.9	N-m
LOCKED ROTOR TORQUE	50.2	N-m
LOCKED ROTOR AMPS	125	

CURVE NO. 326372-702