




Franklin Electric

MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	460	HERTZ	60	RATING	FRAME	6 INCH SUB	HP	40
	ST.MFD		RUN MFD			MODEL	262617	VOLTS	460
	TEST PR	8558	PAGE	1		RPM	3450	PHASE	3
	APPR BY		DATE			S.F.	1.15	HERTZ	60
						TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

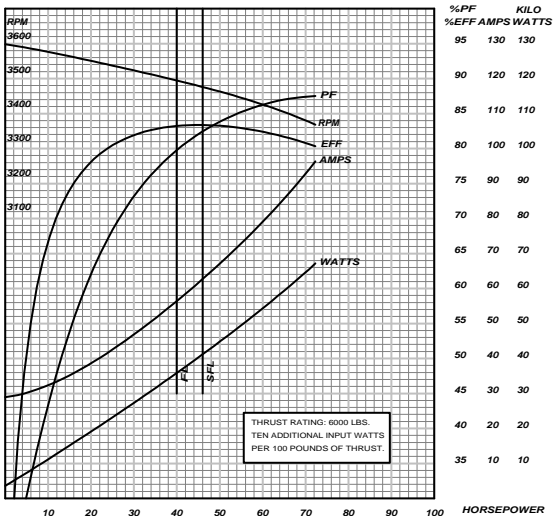

THRUST RATING: 6000 LBS.
TEN ADDITIONAL INPUT WATTS
PER 100 POUNDS OF THRUST.

FULL LOAD TORQUE	60.1	LB-FT
BREAKDOWN TORQUE	212	LB-FT
LOCKED ROTOR TORQUE	134	LB-FT
LOCKED ROTOR AMPS	382	