



MOTOR PERFORMANCE CHARACTERISTICS


T E S T	VOLTS	400	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8748	PAGE	1
	APPR BY		DATE	

R A T I O N G	FRAME	6" RW	kW	7.5
	MODEL	262612	VOLTS	380-415
	RPM	2880	PHASE	3
	S.F.	1	HERTZ	50
	TYPE	3 PHASE		

REMARKS:

RUNNING IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE

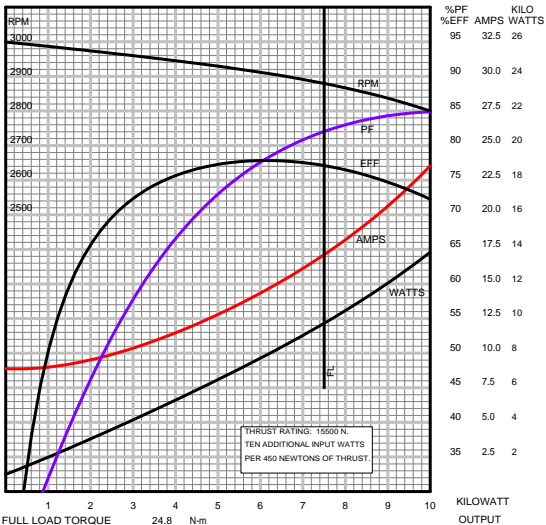

FULL LOAD TORQUE	24.8	N-m
BREAKDOWN TORQUE	46.1	N-m
LOCKED ROTOR TORQUE	21.7	N-m
LOCKED ROTOR AMPS	63.0	

CURVE NO. 326375-702