

QISCROSS HYDRANT & SPARES

QISCROSS SCREWED HYDRANT (SOUTHERN CROSS TYPE)



- 80mm (3") QISCROSS Screwed Hydrant
- 100mm (4") QISCROSS Screwed Hydrant
- 125mm (5") QISCROSS Screwed Hydrant

These Screwed Hydrants are interchangeable with the Southern Cross style hydrants and feature a stainless steel spindle, top cap and sealing plate.

- QH3**
- QH4** [Link](#)
- QH5**

QISCROSS HYDRANT OUTLET (SOUTHERN CROSS TYPE)




- 80mm (3") QISCROSS Hydrant Outlet
- 100mm (4") QISCROSS Hydrant Outlet
- 125mm (5") QISCROSS Hydrant Outlet


These Hydrant Outlets are interchangeable with the Southern Cross style outlets and comes standard with stainless steel handle and cast stainless drive dog

- QO3**
- QO4** [Link](#)
- QO5**

SCREWED HYDRANT

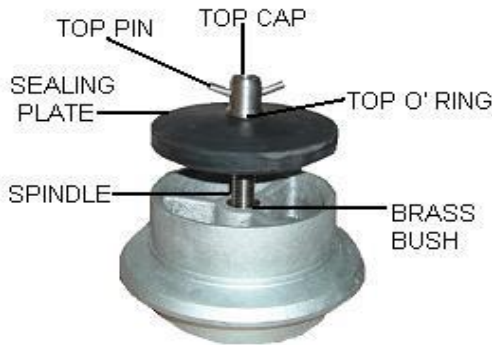

HYDRANT OUTLET

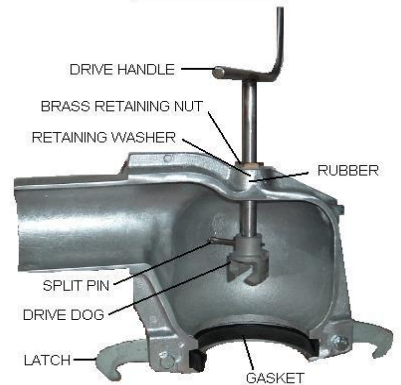

QISCROSS SCREWED HYDRANT SPARES

- 80mm (3") Sealing Plate (Rubber coated stainless steel)
- 100mm (4") Sealing Plate (Rubber coated stainless steel)
- 125mm (5") Sealing Plate (Rubber coated stainless steel)
- Spindle Complete (Stainless Steel)(Includes QP4,QP5,QP6)
- Top Cap (Stainless Steel)
- Top Pin (Stainless Steel)
- Top O' Ring
- Brass Bush (Press Fit)

- QP0**
- QP1**
- QP2**
- QP3** [Link](#)
- QP4**
- QP5**
- QP6**
- QP14**

QISCROSS HYDRANT OUTLET SPARES

- Stainless Steel Drive Handle
- Brass Retaining Nut
- Stainless Steel Retaining Washer
- Handle Vee Seal (Rubber)
- Bottom Drive Dog (Cast Stainless Steel)
- Stainless Steel Drive Dog Split Pin
- Steel Side Latch
- 80mm (3") Outlet Gasket (use 100mm (4") QISCROSS Vee Rubber)
- 100mm (4") Outlet Gasket (use 125mm (5") QISCROSS Vee Rubber)
- 125mm (5") Outlet Gasket (use 150mm (6") QISCROSS Vee Rubber)

- QP7**
- QP8**
- QP9**
- QP10** [Link](#)
- QP11**
- QP12**
- QP13**
- E4672**
- E4665** [Link](#)
- E5753**

QISCROSS FEMALE ADAPTOR (ALUMINIUM) COMPLETE WITH VEE RUBBER



100mm (4") Female Adaptor Aluminium Complete with J159 Vee Rubber. For Welding to QO4

- QO4FA** [Link](#)



125mm (5") Female Adaptor Aluminium Complete with J282 Vee Rubber. For Welding to QO5

- QO5FA**