




Irrigation
direct.com.au

FITTINGS



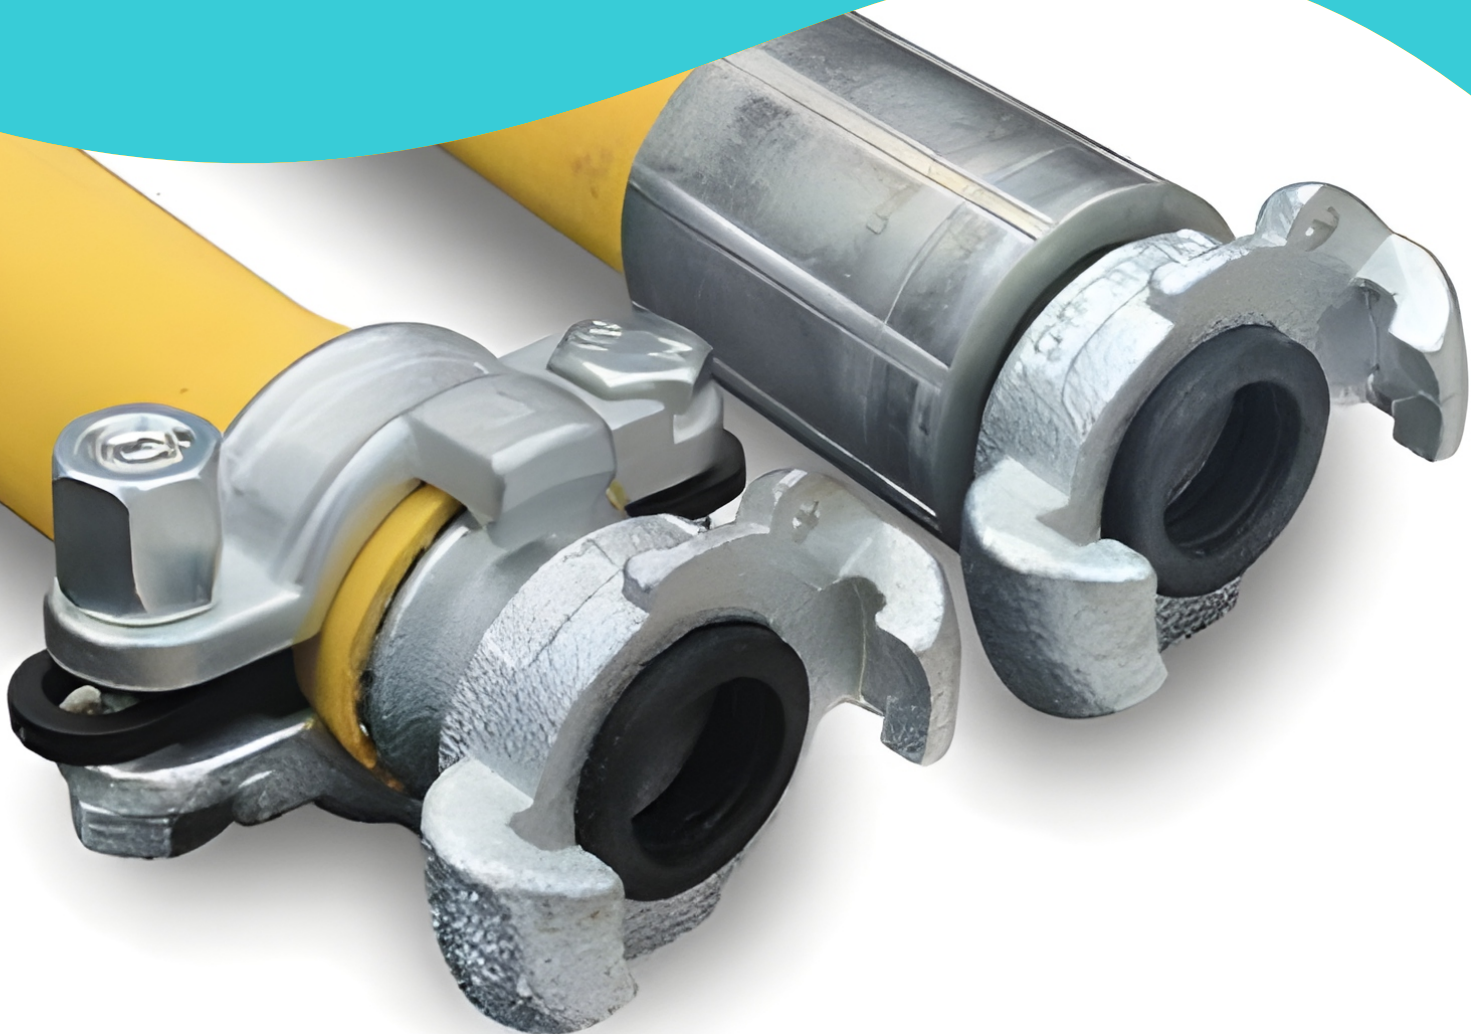

COMBINATION NIPPLE



Quality plated steel combination nipple male BSP hose fittings suitable for many industrial applications.

P/N	BSP SIZE	HOSE
F-CBP-012	1/2"	1/2"
F-CBP-020	3/4"	3/4"
F-CBP-025	1"	1"
F-CBP-032	1-1/4"	1-1/4"
F-CBP-038	1-1/2"	1-1/2"
F-CBP-050	2"	2"
F-CBP-063	2-1/2"	2-1/2"
F-CBP-075	3"	3"
F-CBP-100	4"	4"
F-CBP-125	5"	5"
F-CBP-150	6"	6"

HOSE JOINER



Quality plated steel hose joiner suitable for many industrial applications where joining hoses is required.

P/N	HOSE	HOSE
F-HJP-012	1/2"	1/2"
F-HJP-020	3/4"	3/4"
F-HJP-025	1"	1"
F-HJP-032	1-1/4"	1-1/4"
F-HJP-038	1-1/2"	1-1/2"
F-HJP-050	2"	2"
F-HJP-065	2-1/2"	2-1/2"
F-HJP-076	3"	3"
F-HJP-100	4"	4"



* Crimp collar version also available

STAINLESS HOSE TAIL



Quality 316 Stainless steel male BSP suitable hose tail for applications requiring corrosion resistance.

P/N	BSP SIZE	HOSE
F-SHT-006	1/4"	1/4"
F-SHT-010	3/8"	3/8"
F-SHT-012	1/2"	1/2"
F-SHT-020	3/4"	3/4"
F-SHT-025	1"	1"
F-SHT-032	1-1/4"	1-1/4"
F-SHT-038	1-1/2"	1-1/2"
F-SHT-050	2"	2"
F-SHT-065	2-1/2"	2-1/2"
F-SHT-075	3"	3"
F-SHT-100	4"	4"

MALE BRASS TAIL



Quality brass male BSP hose tail suitable for many industrial applications.

P/N	BSP SIZE	HOSE
F-BRL-012	1/2"	1/2"
F-BRL-020	3/4"	3/4"
F-BRL-025	1"	1"
F-BRL-032	1-1/4"	1-1/4"
F-BRL-038	1-1/2"	1-1/2"
F-BRL-050	2"	2"
F-BRL-075	3"	3"
F-BRL-100	4"	4"


FEMALE BRASS TAIL



Brass female BSP hose tail suitable for many industrial applications.

P/N	BSP SIZE	HOSE
F-BRN-012	1/2"	1/2"
F-BRN-020	3/4"	3/4"
F-BRN-025	1"	1"
F-BRN-032	1-1/4"	1-1/4"
F-BRN-038	1-1/2"	1-1/2"
F-BRN-050	2"	2"
F-BRN-075	3"	3"
F-BRN-100	4"	4"

STAINLESS CRIMP TAIL



Quality stainless steel male BSP crimp tail to use with crimp ferrule.

P/N	BSP SIZE	HOSE
F-SHT-006	1/4"	1/4"
F-SHT-010	3/8"	3/8"
F-SHT-012	1/2"	1/2"
F-SHT-020	3/4"	3/4"
F-SHT-025	1"	1"
F-SHT-032	1-1/4"	1-1/4"
F-SHT-038	1-1/2"	1-1/2"
F-SHT-050	2"	2"
F-SHT-075	3"	3"
F-SHT-100	4"	4"

* Unequal sizes also available on request on all the above hose fittings.



TYPE "A" HOSE TAIL

Safety (claw) couplings are easy to connect & disconnect with out tools. Made of quality plated steel to resist corrosion. c/w with seal.



P/N	SIZE NOM.	HOSE	PRESSURE
F-LAH038	10mm	3/8"	300 PSI
F-LAH050	12mm	1/2"	300 PSI
F-LAH075	20mm	3/4"	300 PSI
F-LAH100	25mm	1"	300 PSI
F-LAH125	32mm	1-1/4"	300 PSI

* Type "S" also available on request

TYPE "A" FEMALE BSP

Safety (claw) couplings are easy to connect & disconnect with out tools. Made of quality plated steel to resist corrosion. c/w with seal.



P/N	SIZE NOM.	BSP SIZE	PRESSURE
F-LAF038	10mm	3/8"	300 PSI
F-LAF050	12mm	1/2"	300 PSI
F-LAF075	20mm	3/4"	300 PSI
F-LAF100	25mm	1"	300 PSI
F-LAF125	32mm	1-1/4"	300 PSI

* Type "S" also available on request

TYPE "A" MALE BSP

Safety (claw) couplings are easy to connect & disconnect with out tools. Made of quality plated steel to resist corrosion. c/w with seal.




P/N	SIZE NOM.	BSP SIZE	PRESSURE
F-LAM038	10mm	3/8"	300 PSI
F-LAM050	12mm	1/2"	300 PSI
F-LAM075	20mm	3/4"	300 PSI
F-LAM100	25mm	1"	300 PSI
F-LAM125	32mm	1-1/4"	300 PSI

* Type "S" also available on request

CLAMPS

Safety (claw) double bolt clamps designed to latch onto the collar of the claw coupling for additional reliability & added safety. Quality plated components to resist corrosion.

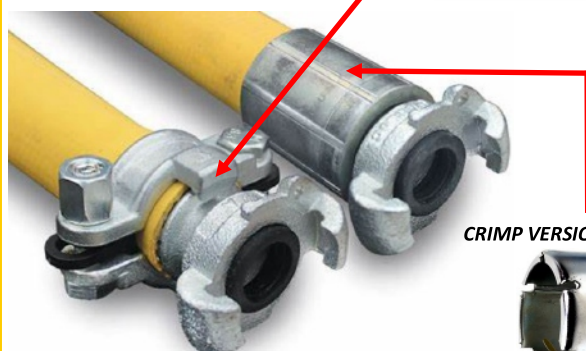

CRIMP VERSION ALSO AVAILBE

P/N	HOSE ID	HOSE OD MIN	HOSE OD MAX
F-CDC038	3/8"	16mm	22mm
F-CDC050	1/2"	19mm	25mm
F-CDC075	3/4"	29mm	34mm
F-CDC100	1"	33mm	38mm
F-CDC125	1-1/4"	42mm	47mm
F-CDC150	1-1/2"	50mm	54mm
F-CDC200	2"	63mm	67mm

F-LAP100	F-LAG100	F-LAT100	F-LAB100
Safety Pins	Seal	3-way	Blank

FITTINGS

HOSE TAILS



BAUER TYPE MALE



Quality Bauer type male plated steel hose fitting.

P/N	COUPLING	HOSE
F-BCG-050MH	2"	2"
F-BCG-080MH	3"	3"
F-BCG-100MH	4"	4"
F-BCG-150MH	6"	6"
F-BCG-200MH	8"	8"
F-BCG-250MH	10"	10"
F-BCG-300MH	12"	12"

BAUER TYPE FEMALE



Quality Bauer type female plated steel hose fitting.

P/N	COUPLING	HOSE
F-BCG-050FH	2"	2"
F-BCG-080FH	3"	3"
F-BCG-100FH	4"	4"
F-BCG-150FH	6"	6"
F-BCG-200FH	8"	8"
F-BCG-250FH	10"	10"
F-BCG-300FH	12"	12"

CLOSURE RING



Quality Bauer type closure ring plated steel.

P/N	COUPLING	HOSE
F-BCG-050CR	2"	2"
F-BCG-080CR	3"	3"
F-BCG-100CR	4"	4"
F-BCG-150CR	6"	6"
F-BCG-200CR	8"	8"
F-BCG-250CR	10"	10"
F-BCG-300CR	12"	12"

BAUER TYPE SET



Quality Bauer type plated steel hose fitting set (male, female, closure ring)

P/N	COUPLING	HOSE
F-BCG-050SET	2"	2"
F-BCG-080SET	3"	3"
F-BCG-100SET	4"	4"
F-BCG-150SET	6"	6"
F-BCG-200SET	8"	8"
F-BCG-250SET	10"	10"
F-BCG-300SET	12"	12"

BAUER TYPE M/M



Quality Bauer type male x male BSP plated steel hose fitting.

P/N	COUPLING	BSP
F-BCG-050MT	2"	2"
F-BCG-080MT	3"	3"
F-BCG-100MT	4"	4"
F-BCG-150MT	6"	6"
F-BCG-200MT	8"	8"
F-BCG-250MT	10"	10"
F-BCG-300MT	12"	12"


BAUER TYPE FM/M



Quality Bauer type female x male BSP plated steel hose fitting.

P/N	COUPLING	BSP
F-BCG-050FT	2"	2"
F-BCG-080FT	3"	3"
F-BCG-100FT	4"	4"
F-BCG-150FT	6"	6"
F-BCG-200FT	8"	8"
F-BCG-250FT	10"	10"
F-BCG-300FT	12"	12"

* Other configurations include: Flanged, Y & T pieces, reducers, 45° & 90° bends, weld on's, seals, strainers etc.

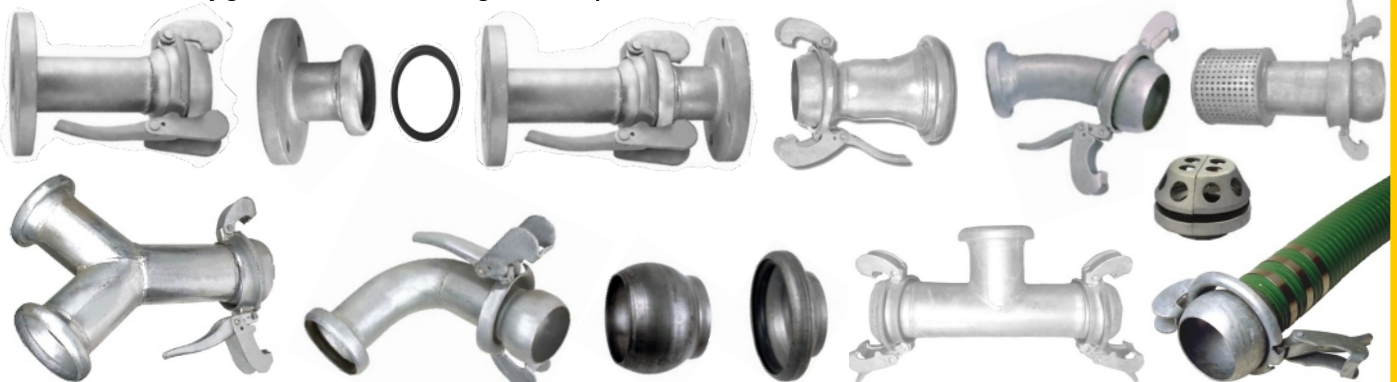



TRAVIS MALE



Quality Travis coupling male plated steel hose fitting.

P/N	COUPLING	HOSE
F-TRV-075M	3"	3"
F-TRV-100M	4"	4"
F-TRV-125M	5"	5"
F-TRV-152M	6"	6"

TRAVIS FEMALE



Quality Travis coupling female plated steel hose fitting.

P/N	COUPLING	HOSE
F-TRV-075F	3"	3"
F-TRV-100F	4"	4"
F-TRV-125F	5"	5"
F-TRV-152F	6"	6"

TRAVIS CLAMP



Quality Travis coupling clamp plated steel.

P/N	COUPLING	HOSE
F-TRV-075LR	3"	3"
F-TRV-100LR	4"	4"
F-TRV-125LR	5"	5"
F-TRV-152LR	6"	6"

TRAVIS SET



Quality Travis coupling set (*male, female, clamp*) plated steel.

P/N	COUPLING	HOSE
F-TRV-075SET	3"	3"
F-TRV-100SET	4"	4"
F-TRV-125SET	5"	5"
F-TRV-152SET	6"	6"

TRAVIS REDUCER



Quality Travis coupling reducer male x female plated steel hose fitting.

P/N	MALE	FEMALE
F-TRV-100075R	4"	3"
F-TRV-125075R	5"	3"
F-TRV-125100R	5"	4"
F-TRV-152075R	6"	3"
F-TRV-152100R	6"	4"
F-TRV-152125R	6"	5"

TRAVIS



Quality Travis rubber seals.

P/N	COUPLING	COUPLING
F-TRV-050MG	3"	3"
F-TRV-080MG	4"	4"
F-TRV-100MG	5"	5"
F-TRV-150MG	6"	6"
F-TRV-200FG	3"	3"
F-TRV-250FG	4"	4"
F-TRV-300FG	5"	5"
F-TRV-152FG	6"	6"

** Also available: Blanking caps, Y Pieces,*



TRAVIS COUPLINGS are primarily used for **waste dry materials and water removal** on non destructive vacuum trucks used in the Hydro-Vac industry, or transferring granules, slurries, powders and sewerage. Non destructive vacuum trucks. Lightweight & easy to use & connect.

FITTINGS

POLYPROPYLENE



BSP FEMALE



Quality Polypropylene BSP female hose tail c/w Nut.

BSP MALE



Quality Polypropylene BSP male hose tail.

FEMALE CAMLOCK



Quality Polypropylene female Camlock hose tail.

P/N	THREAD	HOSE
F-PPN-012	1/2"	1/2"
F-PPN-020	3/4"	3/4"
F-PPN-025	1"	1"
F-PPN-032	1-1/4"	1-1/4"
F-PPN-038	1-1/2"	1-1/2"
F-PPN-050	2"	2"
F-PPN-075	3"	3"

P/N	THREAD	HOSE
F-PPL-012	1/2"	1/2"
F-PPL-020	3/4"	3/4"
F-PPL-025	1"	1"
F-PPL-032	1-1/4"	1-1/4"
F-PPL-038	1-1/2"	1-1/2"
F-PPL-050	2"	2"
F-PPL-075	3"	3"

P/N	SIZE	HOSE
C-PP-012C	1/2"	1/2"
C-PP-020C	3/4"	3/4"
C-PP-025C	1"	1"
C-PP-032C	1-1/4"	1-1/4"
C-PP-038C	1-1/2"	1-1/2"
C-PP-050C	2"	2"
C-PP-075C	3"	3"
C-PP-100C	4"	4"

THREADED FITTINGS



BSP Hex Nipple BSP Reducer BSP Socket BSP Plug BSP FF Elbow BSP MF Elbow BSP Tee BSP Union BSP Cap



P/N Thread Size Chart (X) = style

P/N	THREAD
F-P-(X)-006	1/4"
F-P-(X)-010	3/8"
F-P-(X)-012	1/2"
F-P-(X)-020	3/4"
F-P-(X)-025	1"
F-P-(X)-032	1-1/4"
F-P-(X)-038	1-1/2"
F-P-(X)-050	2"
F-P-(X)-065	2-1/2"
F-P-(X)-075	3"
F-P-(X)-100	4"

Manufactured from high performance, UV resistant polypropylene material that prevents moisture absorption and sustains product dimensions. The chemical and corrosion resistance provides reliable, long life connections suitable for diverse applications and is a cost effective alternative to metal fittings.

The precision BSP tapered threads have been engineered to maximise sealing performance and the hexagonal body makes them easy to install.

Suitable for working pressures up to PN16 (1600kPa, 235psi) for sizes up to 2" and up to PN10 (1000kPa, 145psi) for sizes up to 4".

Manufactured to ISO9001 quality endorsed standards. Made for Australian conditions.



IBC FITTINGS

High quality Polypropylene IBC fittings used to connect to Plastic Intermediate bulk containers usually 1000 Litre capacity. Thread, valve & hose connection options are available to suit any application. C/W white PE gasket.



IBC FEM X BSP FEM



IBC FEM X BSP MALE



IBC FEM X CAMLOCK MALE



IBC FEM X HOSE TAIL

P/N	IBC	CONNECTION
F-IBC-012F	50mm FEM NW50	1/2" BSP FEMALE
F-IBC-020F	50mm FEM NW50	3/4" BSP FEMALE
F-IBC-025F	50mm FEM NW50	1" BSP FEMALE
F-IBC-040F	50mm FEM NW50	1-1/2" BSP FEMALE
F-IBC-050F	50mm FEM NW50	2" BSP FEMALE
F-IBC-020M	50mm FEM NW50	3/4" BSP MALE
F-IBC-025M	50mm FEM NW50	1" BSP MALE
F-IBC-040M	50mm FEM NW50	1-1/2" BSP MALE
F-IBC-050M	50mm FEM NW50	2" BSP MALE
F-IBC-025A	50mm FEM NW50	1" CAMLOCK MALE
F-IBC-040A	50mm FEM NW50	1-1/2" CAMLOCK MALE
F-IBC-050A	50mm FEM NW50	2" CAMLOCK MALE
F-IBC-012HT	50mm FEM NW50	1/2" HOSE TAIL
F-IBC-020HT	50mm FEM NW50	3/4" HOSE TAIL
F-IBC-025HT	50mm FEM NW50	1" HOSE TAIL
F-IBC-032HT	50mm FEM NW50	1-1/4" HOSE TAIL
F-IBC-040HT	50mm FEM NW50	1-1/2" HOSE TAIL
F-IBC-050HT	50mm FEM NW50	2" HOSE TAIL

IBC ACCESSORIES



Shut of valves available: Ball / Butterfly style & FKM seal



Ball Valve style with EPDM seal



IBC Reducer adapter



Vent / seal Red Cap



IBC Cap



IBC Male Hose Tail



POLYPROPYLENE Camlocks



Seals



Clear PVC/PU with Wire helix Chemical Suction hose available

We can also provide a range of rubber chemical hoses & custom made assemblies to suit your specific application, please contact us for a quote.

FITTINGS

HYGIENIC-FOOD



BSM RJT FEMALE



316 stainless steel BSM/RJT standard female crimp hose tail c/w Nut.

BSM CIP FEMALE



316 stainless steel BSM/CIP flat face female crimp hose tail c/w Nut.

BSM MALE



316 stainless steel BSM/CIP male crimp hose tail.

P/N	THREAD	HOSE
F-BSM-025F-RJT	1"	1"
F-BSM-038F-RJT	1-1/2"	1-1/2"
F-BSM-050F-RJT	2"	2"
F-BSM-065F-RJT	2-1/2"	2-1/2"
F-BSM-075F-RJT	3"	3"
F-BSM-100F-RJT	4"	4"

P/N	THREAD	HOSE
F-BSM-025F-CIP	1"	1"
F-BSM-038F-CIP	1-1/2"	1-1/2"
F-BSM-050F-CIP	2"	2"
F-BSM-065F-CIP	2-1/2"	2-1/2"
F-BSM-075F-CIP	3"	3"
F-BSM-100F-CIP	4"	4"

P/N	THREAD	HOSE
F-BSM-025M-CIP	1"	1"
F-BSM-038M-CIP	1-1/2"	1-1/2"
F-BSM-050M-CIP	2"	2"
F-BSM-065M-CIP	2-1/2"	2-1/2"
F-BSM-075M-CIP	3"	3"
F-BSM-100M-CIP	4"	4"

TRI-CLOVER



316 stainless steel Tri-Clover crimp tail.

TRI-CLOVER CLAMP



316 stainless steel Tri-Clover clamp.

SS 304 FERRULES



304 SS LD ferrule



304 SS HD ferrule

P/N	COUPLING	HOSE
F-TRI-025H	1"	1"
F-TRI-038H	1-1/2"	1-1/2"
F-TRI-050H	2"	2"
F-TRI-075H	3"	3"
F-TRI-100H	4"	4"

P/N	COUPLING	HOSE
F-TRI-025C	1"	1"
F-TRI-038C	1-1/2"	1-1/2"
F-TRI-050C	2"	2"
F-TRI-075C	3"	3"
F-TRI-100C	4"	4"

P/N	HOSE
HY-CFS10	1"
HY-CFS13	1-1/4"
HY-CFS15	1-1/2"
HY-CFS20	2"
HY-CFS25	2-1/2"
HY-CFS30	3"
HY-CFS40	4"

P/N	HOSE
HY-SSF10	1"
HY-SSF13	1-1/4"
HY-SSF15	1-1/2"
HY-SSF20	2"
HY-SSF25	2-1/2"
HY-SSF30	3"
HY-SSF40	4"

SEALS



Hygienic food grade seals for BSM & Tri-Clover fittings.

SIZE	P/N	P/N	P/N
1"	F-BSM-025S-RJT	F-BSM-025S-CIP	F-TRI-025S
1-1/2"	F-BSM-038S-RJT	F-BSM-038S-CIP	F-TRI-038S
2"	F-BSM-050S-RJT	F-BSM-050S-CIP	F-TRI-050S
3"	F-BSM-075S-RJT	F-BSM-075S-CIP	F-TRI-075S
4"	F-BSM-100S-RJT	F-BSM-100S-CIP	F-TRI-100S



* Thread protectors available



BSM connection system



HOSE TAIL



Quality alloy Storz hose tail

P/N	HOSE
F-STZ-025H	1"
F-STZ-038H	1-1/2"
F-STZ-050H	2"
F-STZ-063H	2-1/2"
F-STZ-075H	3"
F-STZ-100H	4"
F-STZ-150H	6"

BSP FEMALE



Quality alloy Storz BSP female

P/N	BSP
F-STZ-025F	1"
F-STZ-038F	1-1/2"
F-STZ-050F	2"
F-STZ-063F	2"
F-STZ-075F	3"
F-STZ-100F	4"
F-STZ-150F	6"

BSP MALE



Quality alloy Storz BSP male

P/N	BSP
F-STZ-025M	1"
F-STZ-038M	1-1/2"
F-STZ-050M	2"
F-STZ-063M	2-1/2"
F-STZ-075M	3"
F-STZ-100M	4"
F-STZ-150M	6"

CAP



Quality alloy Storz cap

P/N	HOSE
F-STZ-025C	1"
F-STZ-038C	1-1/2"
F-STZ-050C	2"
F-STZ-063C	2-1/2"
F-STZ-075C	3"
F-STZ-100C	4"
F-STZ-150C	6"

REDUCER



Quality alloy Storz reducer

P/N	SIZE
F-STZ-038025R	1-1/2" x 1"
F-STZ-050025R	2" x 1"
F-STZ-050038R	2" x 1-1/2"
F-STZ-063038R	2-1/2" x 1-1/2"
F-STZ-063050R	2-1/2" x 2"
F-STZ-075050R	3" x 2"
F-STZ-100075R	4" x 3"

FIRE ADAPTOR



Alloy Storz fire adaptors

P/N	SIZE
F-STZ-063FNSW	2-1/2"
F-STZ-063MNSW	2-1/2"
F-STZ-063FCFA	2-1/2"
F-STZ-063MCFA	2-1/2"
F-STZ-063FQRT	2-1/2"
F-STZ-063MQRT	2-1/2"

PLASTIC CAP



Red plastic Storz cap

P/N	BSP
F-STZ-025PC	1"
F-STZ-038PC	1-1/2"
F-STZ-050PC	2"
F-STZ-063PC	2-1/2"
F-STZ-075PC	3"
F-STZ-100PC	4"
F-STZ-150PC	6"

SEALS



Storz seal




P/N	BSP
F-STZ-025S	1"
F-STZ-038S	1-1/2"
F-STZ-050S	2"
F-STZ-063S	2-1/2"
F-STZ-075S	3"
F-STZ-100S	4"
F-STZ-150S	6"

FEATURES

- DIN Standard Forged Storz Couplings Connection.
- Compliant with Emergency Services Specifications.
- Manufactured from high performance aluminium material that is lightweight, durable & corrosion resistant.
- Provides reliable, long life connections suitable for fire fighting, agricultural, water trucks, etc.
- The precision BSP tapered threads have been engineered to maximise sealing performance.
- Suitable for working pressures up to 15 bar (217psi).
- Made for Australian conditions.

FITTINGS

BRASS

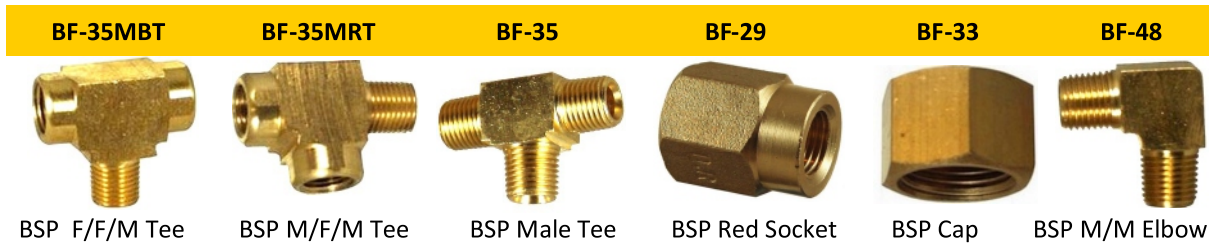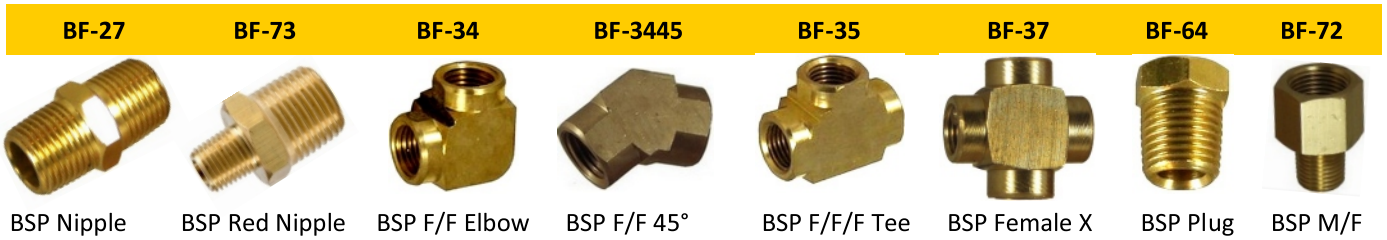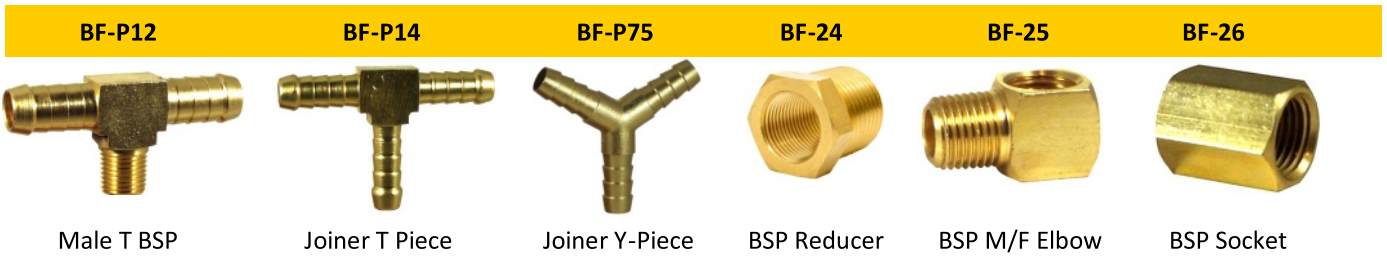

P/N Size Chart, (X) = style

P/N	SIZE
BF-(X)-006	1/4"
BF-(X)-010	3/8"
BF-(X)-012	1/2"
BF-(X)-020	3/4"
BF-(X)-025	1"
BF-(X)-032	1-1/4"
BF-(X)-038	1-1/2"
BF-(X)-050	2"


Manufactured from high quality Brass material providing reliable, long life connections suitable for diverse applications for air lines, water, petroleum products, and corrosion resistance is required.

The precision BSP tapered threads have been engineered to maximise sealing performance and the hexagonal body makes them easy to install.

Made for Australian conditions.

FITTINGS

BLACK STEEL

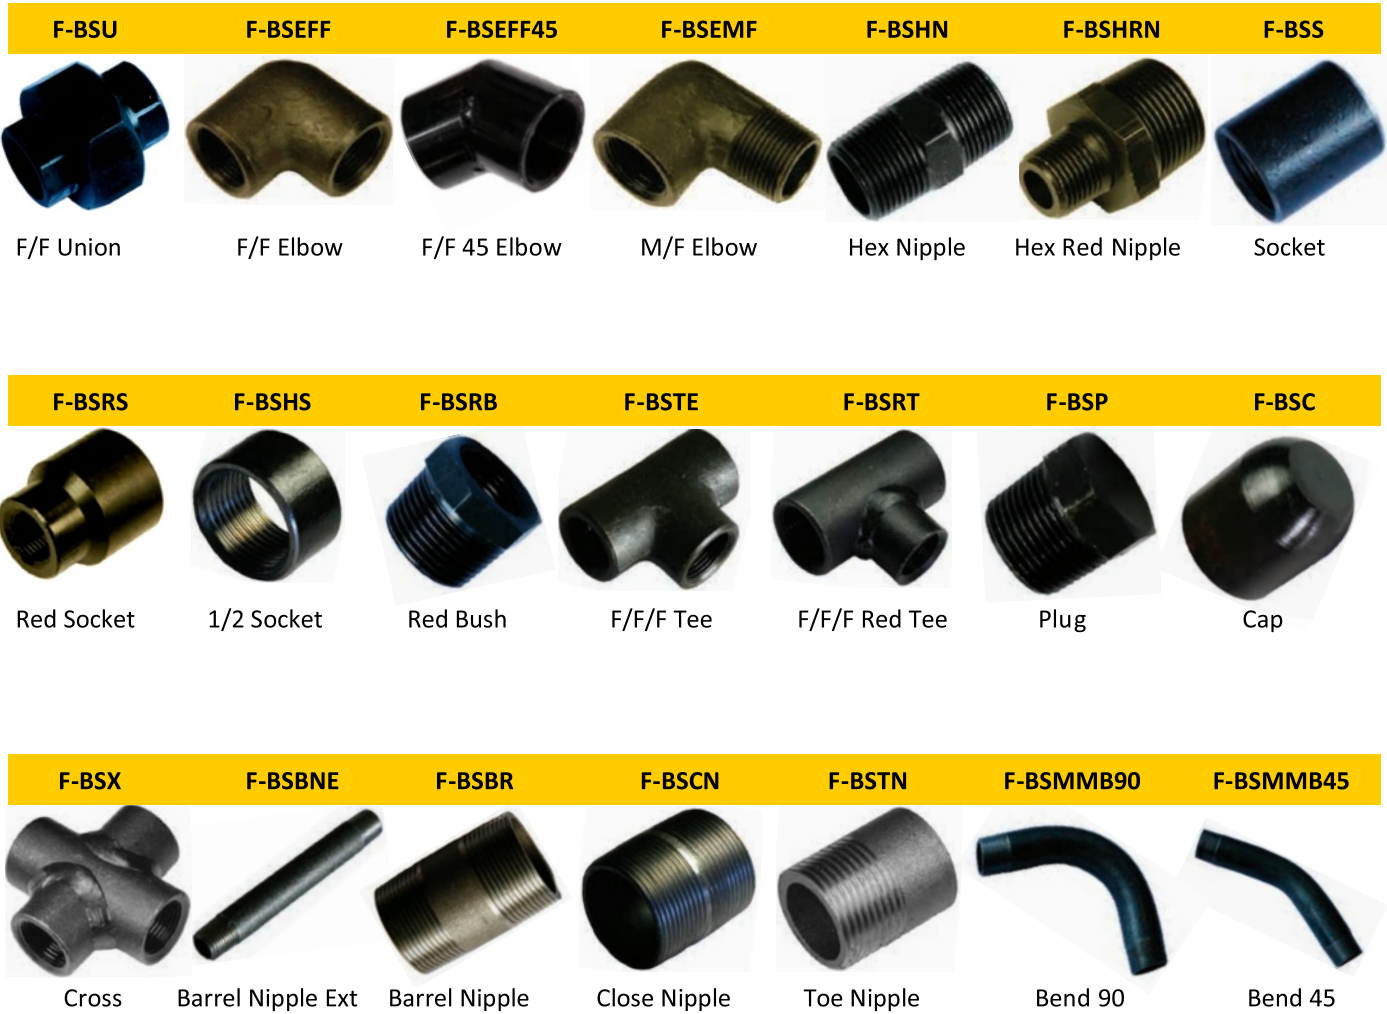

P/N Size Chart, (X) = style

P/N	SIZE
F-BS(X)-005	1/8"
F-BS(X)-006	1/4"
F-BS(X)-010	3/8"
F-BS(X)-012	1/2"
F-BS(X)-020	3/4"
F-BS(X)-025	1"
F-BS(X)-032	1-1/4"
F-BS(X)-038	1-1/2"
F-BS(X)-050	2"
F-BS(X)-065	2-1/2"
F-BS(X)-075	3"
F-BS(X)-100	4"

British Standard Threads							
All measurements in mm							
NOMINAL BORE OF PIPE		APPROX. OUTSIDE DIAMETER	NUMBER OF THREADS PER INCH	PITCH	DEPTH OF THREADS	DIAMETER AT GAUGE PLANE	LENGTH OF USEFUL THREAD
IMPERIAL	METRIC	A		P	h	B	E
1/8	6	10.16	28	0.907	0.581	9.72	6.5
1/4	8	13.66	19	1.337	0.856	13.15	9.7
3/8	10	17.17	19	1.337	0.856	16.66	10.1
1/2	15	21.51	14	1.814	1.162	20.95	13.2
3/4	20	27.00	14	1.814	1.162	26.44	14.5
1	25	33.93	11	2.309	1.479	33.24	16.8
1 1/4	32	42.59	11	2.309	1.479	41.91	19.1
1 1/2	40	48.48	11	2.309	1.479	47.80	19.1
2	50	60.47	11	2.309	1.479	59.61	23.4
2 1/2	65	76.09	11	2.309	1.479	75.18	26.7
3	80	88.87	11	2.309	1.479	87.68	29.8
4	100	114.14	11	2.309	1.479	113.03	35.8
5	125	139.65	11	2.309	1.479	138.43	40.1
6	150	165.12	11	2.309	1.479	163.83	40.1




Manufactured from high quality Steel material providing reliable, long life connections suitable for diverse applications for air lines, water, petroleum products, and many general industrial applications.

The precision BSP tapered threads have been engineered to maximise sealing performance and the hexagonal body makes them easy to install. BS EN 10241: 2000

Made for Australian conditions.

FITTINGS

GAL MAL

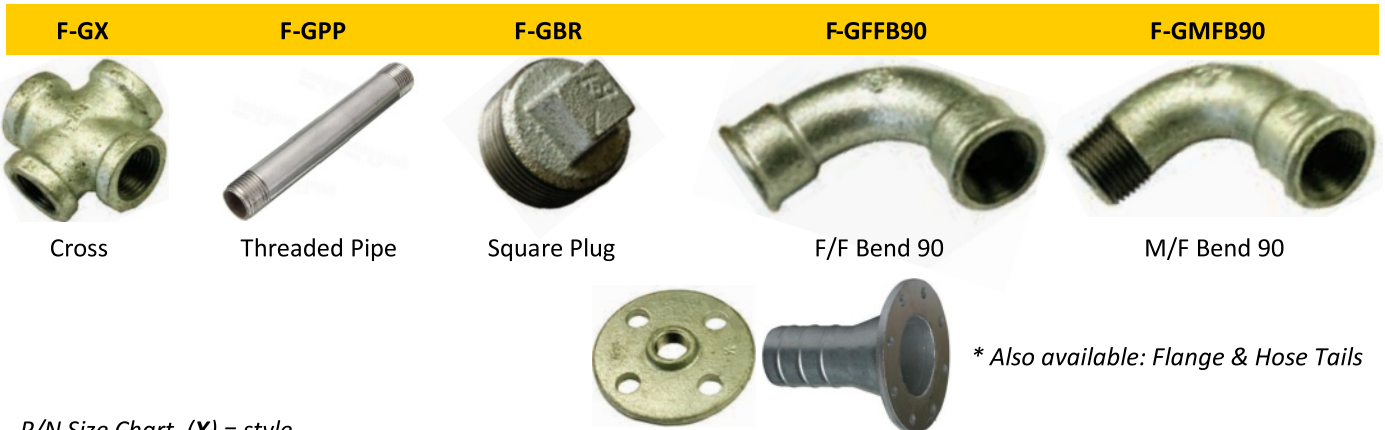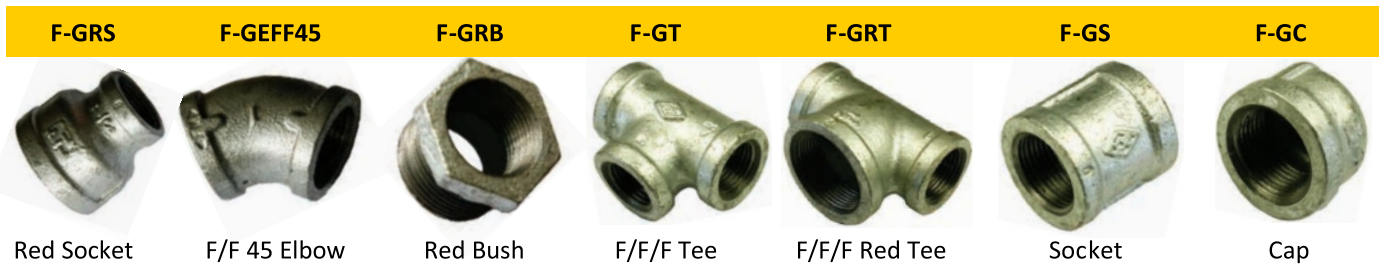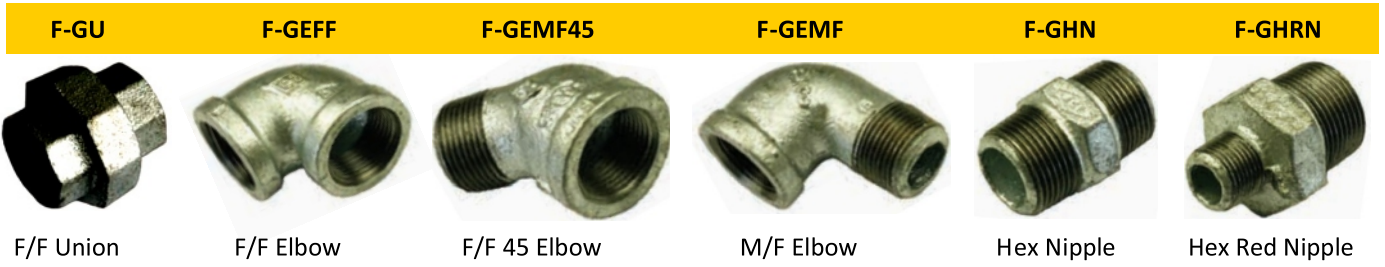

P/N Size Chart, (X) = style

P/N	SIZE
F-G(X)-005	1/8"
F-G(X)-006	1/4"
F-G(X)-010	3/8"
F-G(X)-012	1/2"
F-G(X)-020	3/4"
F-G(X)-025	1"
F-G(X)-032	1-1/4"
F-G(X)-038	1-1/2"
F-G(X)-050	2"
F-G(X)-065	2-1/2"
F-G(X)-075	3"
F-G(X)-100	4"

STANDARD AND IDENTIFICATION:

Standard for production and use EN 10242 : 1994

Fittings made of high quality blackheart malleable cast iron to ASTM A-197, ASTM A47

THREADS: The threads are cut according to AS 1722.1 / ISO 7/1. Parallel internal thread (RP) and tapered external thread (R).

APPLICATION: All the fittings are adequate for the supply of water at recommended maximum working pressure of 1379kPa and gas, steam and compressed air at recommended maximum working pressure of 1034 kPa. Note: Working pressures may also be limited by relevant pressure piping codes or Industry regulations.

DIMENSIONS: All the fittings are manufactured to the specifications of standard BS EN 10242, BS 143, BS 1256

INSPECTION: All the fittings are inspected for conformity with the specifications of standard EN 10242.

MARKING: All the fittings, when possible, are marked with brand and/or with the nominal size identification.

HOT DIP: The fittings are delivered in hot dip galvanised finish, as prescribed by the standard EN 10242.

LEAK TEST: Applying the standard EN 10242 each individual fitting is subjected to a pressure test with a min. Hydrostatic pressure of 2068 kPa, which is equivalent to a pneumatic pressure of min. 500 kPa, without showing any sign of leakage or abnormality.

Manufactured from high quality galvanised Steel material providing reliable, long life connections suitable for diverse applications for air lines, water, petroleum products, and many general industrial applications.

The precision BSP tapered threads have been engineered to maximise sealing performance and the hexagonal body makes them easy to install. BS EN 10241: 2000

Made for Australian conditions.

FITTINGS

STAINLESS STEEL



P/N Size Chart, (X) = style

P/N	SIZE
F-SS(X)-005	1/8"
F-SS(X)-006	1/4"
F-SS(X)-010	3/8"
F-SS(X)-012	1/2"
F-SS(X)-020	3/4"
F-SS(X)-025	1"
F-SS(X)-032	1-1/4"
F-SS(X)-038	1-1/2"
F-SS(X)-050	2"
F-SS(X)-065	2-1/2"
F-SS(X)-075	3"
F-SS(X)-100	4"



Also available: SS Ball Valves, SS Hose Tails, Crimp ferrules, etc.



Manufactured from high quality 316 Stainless Steel material providing reliable, long life connections suitable for diverse applications for air lines, water, petroleum products, and many general industrial applications, water, chemicals etc.

The precision BSP tapered threads have been engineered to maximise sealing performance and the hexagonal body makes them easy to install. BS EN 10241: 2000

Made for Australian conditions.



Irrigation
direct.com.au

FITTINGS

For Assistance please contact Michael: 0488 917 285 or
michael@irrigationdirect.com.au

