
























HOSE & PIPES



PVC HOSE

QUICK FIND INDEX



	PERFORMER AIR	1
	SAFETY YELLOW	1
	RECLAIMED WATER	2
	GARDEN HOSE	2
	TURF / WASHDOWN	2
	PRP MULTI-PURPOSE	3
	DRUM PUMP	3
	DRINKING WATER	4
	AIR BREATHING	4
	VACUPRESS®	5
	ARMOVIN®	5
	YELLOW FRAS	6
	FIRE REEL	6
	AG SPRAYCHEM	7
	PESTICIDE WEEDICIDE	7
	GREY WATER SUCTION	8
	BLUE OIL SUCTION	8
	BLACK OIL SUCTION	9
	PLUTONE®	9
	MILKFLEX	10
	RED WINE BEVERAGE	10

PVC HOSE

QUICK FIND INDEX
























	MULCH BLOWER	11
	HEAVY DUTY SUCTION	11
	AIR SEEDER	12
	BARFLO [®] SUCTION	12
	MARINEFLEX [®]	12
	ARVAC [®]	13
	INDUS [®]	13
	TPR DUCTING	14
	EOLO [®] DUCTING	14
	GREY DUCTING	15
	CLEAR VINYL TUBE	16
	EVA BEVERAGE TUBE	16
	LDPE TUBE	17
	NYLON TUBE	17
	BLUE LAYFLAT	18
	RED LAYFLAT	18
	TRAVELLING IRRIGATOR	19
	OROFLEX [®] 10 & 20 BAR	19
	OROFLEX [®] AQUA [™]	20
	OROFLEX [®] ARMTEX [™]	20

RUBBER HOSE

QUICK FIND INDEX



	RED VARIFLEX™ MPR	21
	ORTAC®	21
	GORILLA®	22
	FRONTIER® YELLOW	22
	FRONTIER® BLACK	23
	FRONTIER® RED	23
	FRAS AIR/WATER DELIVERY	24
	FRAS AIR/WATER SUCTION	24
	CABLE TRAILING HOSE	24
	H/D AIR/WATER DELIVERY	25
	BLAST LOADING HOSE	25
	SLURRY DE WATERING	25
	HOT AIR BLOWER	26
	BULK FOOD HANDLING	26
	SANDBLAST	26
	BULK MATERIALS HANDLING	27
	MUFF COUPLING HOSE	27
	MUFF COUPLINGS	27
	CONCRETE TEXTILE	28
	CONCRETE STEEL	28
	CONCRETE G820	28

RUBBER HOSE

QUICK FIND INDEX














	VACUUM	29
	GREEN HORNET	29
	EXTREMEFLEX™ WATER	30
	WATER DELIVERY	31
	WATER SUCTION	31
	STEEL STEAM	32
	FORTRESS® BLUE FDA	33
	FORTRESS® YELLOW	33
	FORTRESS® WHITE	33
	SANI-WASH™ SUPREME	34
	RED WASHDOWN	34
	FORTRESS® YELLOW 3000	34
	NEPTUNE 6000	35
	NEPTUNE 3000	35
	CARPET CLEANING HOSE	36
	EXTREMEFLEX™ FOOD	37
	VINTNER™	37
	EXTREMEFLEX™ RED	38
	RED BREWERS DELIVERY	38
	EXTREMEFLEX™ PETROLEUM	39
	OIL SUCTION & DELIVERY	39

RUBBER HOSE

QUICK FIND INDEX



	OIL DELIVERY	40
	HOT TAR BITUMEN TRANSFER	40
	HOT TAR WAND	40
	PETROL BOWSER	41
	AIRCRAFT FUELING	41
	BC MARINA FUELING	41
	CHEMONE®	42
	PUREONE®	42
	WET EXHAUST	43
	MARINE FUEL A1	43
	PUSH-ON HOSE	44
	NR SPRAY	45
	DEF DISPENSING	45
	FUEL LINE 30R6	46
	FUEL LINE 30R7	46
	FUEL / VAPOUR / EMISSION	46
	HEATER HOSE ECONOMY	47
	HEATER HOSE PREMIUM	47
	HEATER HOSE EXTREME TEMP	47
	STRAIGHT RADIATOR & OIL	48
	RUBBER AIR BRAKE	49

RUBBER HOSE

QUICK FIND INDEX



	POWER BRAKE VACUUM	49
	SAE100R5 SAEJ1402	49
	TRANSMISSION COOLER	50
	WASHER / VACUUM	50
	FUEL EMISSION VACUUM	50
	POWER STEERING RETURN	50
	MARINE FUEL LINE	50
	MARINE FUEL FILL	50
	MARINEFLEX®	50
	PETROLEUM COMPOSITE	51
	OIL COMPOSITE	51
	CHEMICAL COMPOSITE	51

SPECIALTY PRODUCTS

Industrial Hose & Fittings are associated with many different quality brands & manufacturers so that we are able to recommend & supply fit for purpose products to suit your specific application.

There are some specialty hoses, belts & rubber products we currently supply for projects & customers that may not necessarily appear in our catalogue. If you can't find a product you are looking for, please contact us for pricing & availability accordingly, contact us for our advice & recommendations. *MOQ may apply.



PVC HOSE

AIR WATER



PERFORMER AIR



General purpose air and water hose with a highly distinctive yellow & blue stripes, optimum flexibility, resilience & kink resistance. Suitable for general purpose air & water supply. Also suitable for the conveyance of liquids, gases and many chemicals. Ideal for high pressure air lines and compressors. Exceeds AS/NZ2554 Class B for burst pressure, wall thickness, abrasion resistance, weathering resistance, low temperature Full Rolls. -5°C to +60°C.



P/N	ID	OD	WP PSI	ROLL MT
PAH-006	6mm	13mm	290	20/100
PAH-008	8mm	15mm	290	20/100
PAH-010	10mm	17mm	290	20/30/100
PAH-012	12mm	19mm	290	20/100
PAH-020	20mm	29mm	230	20/100
PAH-025	25mm	35mm	230	20/100
A-PAH-010-020	10mm	17mm	290	20M FITTED
A-PAH-010-030	10mm	17mm	290	30M FITTED
A-PAH-012-020	12mm	19mm	290	20M FITTED
A-PAH-012-030	12mm	19mm	290	30M FITTED



SAFETY YELLOW




A versatile heavy duty PVC hose suitable for use in compressed air and water applications. Safety Yellow has excellent UV resistance to withstand the extreme Australian conditions, and the highly visible yellow ribbed cover provides superior abrasion resistance. Conforms to AS2554-Class B. Full Rolls. -5°C to +60°C.




P/N	ID	OD	WP PSI	ROLL MT
SYH-006	6mm	13mm	230	20/100
SYH-008	8mm	15mm	230	20/100
SYH-010	10mm	17mm	230	20/100
SYH-012	12mm	19mm	230	20/100
SYH-020	20mm	28mm	230	20/100
SYH-025	25mm	35mm	230	20/100
SYH-032	32mm	43mm	230	20/60
SYH-038	38mm	50mm	230	20/60
SYH-050	50mm	63mm	230	20/40

CUSTOM ASSEMBLIES

Factory fitted air hose assemblies complete with high quality Nitto style air couplings Ready-2-Go in 20M & 30M lengths. 



Factory fitted Hose assemblies complete with High Quality connections Ready-2-Go in 20M lengths or custom lengths to your requirements. Contact IHF for custom hoses made to your specific requirements. 

READY  GO

PVC HOSE

WATER



RECLAIMED WATER



A hose specially formulated to use with reclaimed water. Lilac cover complies with the international standard for use with reclaimed water. Used for watering parks and gardens with reclaimed water. Also suitable for use as a domestic garden hose. -10°C to +60°C.



"RECLAIMED WATER NOT FOR DRINKING" printed along hose length for added safety.



P/N	ID	OD	WP PSI	ROLL MT
WRC-012	12mm	17mm	145	20/100
WRC-020	20mm	25mm	145	20/100
WRC-025	25mm	34mm	145	20/100

GARDEN HOSE



A high quality reinforced flexible garden hose with excellent kink resistant and good UV light resistance for general domestic use. -10°C to +60°C.



P/N	ID	OD	WP PSI	ROLL MT
GHH-012	12mm	17mm	90	20/30/100
GHH-020	19mm	25mm	90	20/30/100

TURF WASHDOWN



Recommended for industrial and rural wash-down and general watering applications. Good resistance to abrasion & white cover for good visibility with excellent UV resistance. Meter marked for easy measuring and cutting. -10°C to +60°C.



P/N	ID	OD	WP PSI	ROLL MT
WBS-020	20mm	29mm	145	20/100
WBS-025	25mm	25mm	145	20/100
WBS-032	32mm	44mm	145	20/60
WBS-038	38mm	50mm	145	20/60



READY MADE HOSES

Hoses made with brass, plastic or stainless fittings, spray nozzles & washdown guns also available. Contact us for details & pricing.

PVC HOSE

MULTI PURPOSE



PRP MULTI-PURPOSE



Translucent Multi-Purpose hose with a red spiral tracer. Uses include air lines, transfer in food processing, water transfer, petroleum products, siphon lines. Complies to AS/NZS 2070 (non toxic food grade) & AS 2445 B. UV stabilised. -10°C to +60°C.




P/N	ID	OD	WP PSI	ROLL MT
PRP-006	6mm	11mm	230	20/100/300
PRP-008	8mm	13mm	230	20/100/300
PRP-010	10mm	15mm	230	20/100/200
PRP-012	12mm	18mm	230	20/100/200
PRP-016	16mm	22mm	230	20/100
PRP-020	20mm	27mm	230	20/100
PRP-025	25mm	33mm	230	20/100
PRP-032	32mm	43mm	230	20/40
PRP-038	38mm	50mm	230	20/40
PRP-050	50mm	64mm	230	20/40



BRASS FITTINGS

Brass screwed fittings available to suit most air, water & petroleum based fluid applications.

DRUM PUMP

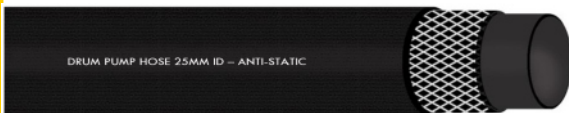

Petrol and oil resistant hose with excellent flexibility for dispensing fuels from overhead tanks and drums. The PVC/Nitrile blend inner tube is highly resistant to hydrocarbons including aromatics. Excellent resistance to UV light ensures a long life. Good low temp flexibility. -20°C to +60°C.



P/N	ID	OD	WP PSI	ROLL MT
HDP-020	20mm	29mm	150	20/100
HDP-025	25mm	34mm	150	20/60
HDP-032	32mm	43mm	150	20/60



CLAMP OPTIONS



PVC HOSE

FOOD GRADE



DRINKING WATER

DRINKING WATER HOSE AS/NZS 2070 NON-TOXIC



Specially manufactured not to taint water. Complies to Australian Standard AS2070 (non-toxic food grade). Made especially for the conveyance of drinking water. This makes it popular within the caravan, boating and recreational vehicle industries. White non-tainting polyolefin tube with a smooth finish, high tenacity polyester yarn reinforcement & UV stabilised clear polyolefin a smooth finish cover.

-10°C to +60°C.



P/N	ID	OD	WP PSI	ROLL MT
DWH-012	12mm	17mm	150	20/100

AIR BREATHING

AIR BREATHING HOSE AS/NZS 2299.1-2007 & AS/NZS 1716-2005



Complies with Australian Standard AS2299-1992. Both inner and outer are manufactured using medical grade PVC. Designed for use in commercial deep sea diving and industrial air breathing applications. Metre marked to make measuring and cutting easier. White medical grade PVC with a smooth finish tube, high strength polyester yarn reinforcement & UV stabilised medical grade PVC with a kink resistant highly visible yellow smooth cover.

-10°C to +60°C.



P/N	ID	OD	WP PSI	ROLL MT
DAB-008	8mm	15mm	350	20/100/300
DAB-010	10mm	17mm	350	20/100/300



ALSO AVAILABLE FOR FOOD CONTACT



CLEAR VINYL TUBE



PLUTONE CLEAR STEEL



STAINLESS FITTINGS

Stainless Steel specialty fittings & couplings are available to suit potable water applications & air breathing / diving applications.

PVC HOSE

FOOD SUCTION



VACUPRESS® CRISTAL



Food grade two layered PVC hose with embedded galvanised steel helix with a polyester textile reinforcement for the transfer & suction of food products, beer, wine, drinking water and milk. Resistant to chemicals used in cleaning and is UV light resistant. Suitable for tanker delivery, drinking water, wine and other food products. Smooth bore enables easy cleaning reducing bacteria build up. -5°C to +65°C



P/N	ID	OD	WP PSI	VACUUM	ROLL MT
VPC-020	20mm	28mm	290	FULL	60
VPC-025	25mm	36mm	290	FULL	60
VPC-032	32mm	43mm	230	FULL	60
VPC-038	38mm	51mm	200	FULL	30
VPC-050	50mm	64mm	200	FULL	30
VPC-063	63mm	77mm	175	FULL	30
VPC-075	75mm	92mm	175	FULL	30
VPC-100	100mm	119mm	145	FULL	30
VPC-127	127mm	145mm	100	FULL	20
VPC-150	150mm	171mm	75	FULL	20


Sanitary food grade couplings available individually or contact us for factory fitted custom hose assemblies.



ARMORVIN® HNA



Food grade soft PVC hose with embedded galvanised steel helix for transfer & suction of food products, alcoholic products up to 50% & dairy products. Resistant to chemicals used in cleaning and is UV light resistant. Smooth bore enables easy cleaning and reduces bacteria build up. -5°C to +65°C

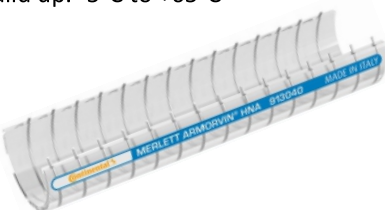

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
ARM-010	10mm	16mm	100	FULL	60
ARM-012	12mm	18mm	100	FULL	60
ARM-016	16mm	22mm	90	FULL	60
ARM-020	20mm	27mm	75	FULL	60
ARM-025	25mm	33mm	75	FULL	60
ARM-032	32mm	41mm	65	FULL	60
ARM-038	38mm	47mm	60	FULL	30
ARM-050	50mm	60mm	45	FULL	30
ARM-063	63mm	72mm	35	FULL	30
ARM-075	75mm	89mm	30	FULL	30
ARM-100	100mm	114mm	30	FULL	30

ARMORVIN® PU

Also available with Polyurethane compound. O-Phthalate free. POA



PVC HOSE

WATER



YELLOW FRAS



Manufactured to AS2660 Class A & AS/NZ2554 Class A for underground air and water mining hose UV stabilised. Fire resistant anti static hose with unique 3 layer construction that offers optimum performance and handling characteristics. -20°C to +60°C.



P/N	ID	OD	WP PSI	ROLL MT
PFR-010	10mm	18mm	300	20/100
PFR-012	12mm	21mm	300	20/30/100
PFR-020	20mm	30mm	300	20/30/100
PFR-025	25mm	35mm	300	20/30/100
PFR-032	32mm	42mm	300	20/100
PFR-038	38mm	49mm	300	20/150/200
PFR-050	50mm	62mm	300	20/100/200

SAFETY COUPLINGS

Hose tail with safety collar and safety pin holes - complete with seal, male & female BSP threaded, type A & S, all plated steel.



Also available, range of hose restraints for added safety

FIRE REEL



Excellent UV resistance, outstanding flexibility with ribbed cover for excellent abrasion resistance. Complies to Australian Standard AS1221. Manufactured with a 4:1 safety factor (burst pressure is four times greater than ing pressure). -20°C to +60°C.



P/N	ID	OD	WP PSI	ROLL MT
FRY-020	20mm	26mm	145	20
RBH-020	20mm	26mm	145	20/36/100
RBH-025	25mm	32mm	145	20/36/100

* Also available with yellow cover FRY



FIRE REEL NOZZLES



READY **2** GO

PVC HOSE

CHEMICAL SPRAY




AG SPRAYCHEM



Transferring diluted weedicides, pesticides in general agricultural and horticultural applications. Ideal for transferring a wide range of demanding chemicals in general industry applications. UV stabilised. -10°C to +60°C.

P/N	ID	OD	WP PSI	ROLL MT
SPC-008	8mm	14mm	300	20/100/200
SPC-010	10mm	19mm	300	20/100/200
SPC-012	12mm	19mm	300	20/100
SPC-020	20mm	28mm	300	20/100
SPC-025	25mm	35mm	300	20/100
SPC-032	32mm	43mm	300	20/30/60
SPC-038	38mm	52mm	300	20/60



PESTICIDE WEEDICIDE



Transferring diluted weedicides, pesticides in general agricultural and horticultural applications. General purpose agricultural spray and chemical hose for medium pressures. Superior resistance to solvents and longer life. -20°C to +60°C.

P/N	ID	OD	WP PSI	ROLL MT
PWH-010	10mm	16mm	300	30/100
PWH-012	12mm	19mm	300	30/100
PWH-020	20mm	27mm	300	30/100



* For higher pressure spraying applications, refer to **NR SPRAY 750 PSI** hose in the rubber section



PVC HOSE

SUCTION



GREY WATER SUCTION




All purpose heavy duty flexible grey water suction PVC hose with a rigid PVC helix. Applications include firefighter pumps, water suction, dewatering construction sites, general agricultural and industrial applications. Smooth inner bore to reduce losses with excellent flexibility. -5°C to +60°C

* 30 Mtr rolls also available on request



P/N	ID	OD	WP PSI	ROLL MT
GSH-025	25mm	32mm	130	20
GSH-032	32mm	39mm	120	20
GSH-038	38mm	46mm	100	20
GSH-044	44mm	54mm	100	20
GSH-050	50mm	60mm	90	20
GSH-063	63mm	74mm	90	20
GSH-075	75mm	88mm	70	20
GSH-100	100mm	116mm	60	20
GSH-125	125mm	140mm	50	20
GSH-150	150mm	160mm	50	20

BLUE OIL SUCTION

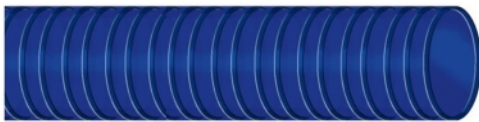

Multi-purpose heavy duty flexible blue oil suction PVC hose with a rigid PVC helix. Uses include transfer & suction of oil based fluids, diesel fuels, & chemical applications. Smooth inner bore to reduce losses and excellent flexibility. -5°C to +60°C

* 30 Mtr rolls also available on request



P/N	ID	OD	WP PSI	ROLL MT
BOS-025	25mm	32mm	130	20
BOS-032	32mm	39mm	120	20
BOS-038	38mm	46mm	100	20
BOS-050	50mm	54mm	90	20
BOS-063	63mm	74mm	90	20
BOS-075	75mm	88mm	70	20
BOS-100	100mm	116mm	60	20

CUSTOM ASSEMBLIES

Suction hose assemblies made to order for your specific application. Fire fighting, dewatering and oil transfer applications. Typical connections include camlocks with various material selection & threaded ends. **R2G**



FIRE FIGHTING KITS

IHF fire fighting kits are also available utilizing premium grey water suction & fire hose products. **R2G**

PVC HOSE

SUCTION



BLACK OIL SUCTION



Heavy duty flexible Black Oil Suction & Delivery PVC hose with a rigid PVC helix. Extremely flexible, with outstanding resistance to hydrocarbon based chemicals, including diesel fuel, petrol, fuel oil greases and lubricants. Smooth bore ensures maximum pumping efficiency. Waste collection trucks, septic tankers, waste oil removal. -5°C to +60°C

P/N	ID	OD	WP PSI	ROLL MT
BLS-020	20mm	25mm	145	20
BLS-025	25mm	32mm	145	20
BLS-032	32mm	39mm	130	20
BLS-038	38mm	46mm	115	20
BLS-050	50mm	64mm	100	20
BLS-063	63mm	74mm	90	20
BLS-075	75mm	88mm	70	20
BLS-100	100mm	116mm	60	20

Select camlock type & material preference for pre-made hose assemblies. **R2G**



PLUTONE®



Multi-purpose flexible clear PVC suction transfer hose with a steel wire helix. FOOD GRADE uses include transfer & suction of food liquids, beverages, fruit juices, wine & liquors up to 20% alcohol concentration, chemical applications & filling or dispensing equipment. Transfer / suction of product where visual indication is necessary. -10°C to +60°C

P/N	ID	OD	WP PSI	ROLL MT
SWR-006	6mm	31mm	75	20
SWR-010	10mm	16mm	75	20
SWR-012	12mm	18mm	75	20
SWR-016	16mm	22mm	75	20
SWR-020	20mm	27mm	75	20
SWR-025	25mm	33mm	60	20
SWR-032	32mm	40mm	60	20
SWR-038	38mm	47mm	60	20
SWR-045	45mm	55mm	60	20
SWR-050	50mm	60mm	60	20
SWR-063	63mm	75mm	50	20
SWR-075	75mm	88mm	50	20
SWR-100	100mm	115mm	35	20
SWR-127	127mm	145mm	18	20
SWR-150	150mm	168mm	18	20



READY **2** GO

PVC HOSE

SUCTION



MILKFLEX



Food Grade PVC suction/discharge hose for the transfer of food products, including beer, wine, drinking water and milk. Resistant to chemicals used in cleaning and is UV light resistant.

Suitable for the tanker delivery of milk, other dairy products, drinking water, wine and other food products. The smooth bore enables easy cleaning reducing bacteria build up.

-5°C to +60°C




P/N	ID	OD	WP PSI	ROLL MT
MKF-025	25mm	32mm	100	20
MKF-032	32mm	39mm	100	20
MKF-038	38mm	46mm	85	20
MKF-050	50mm	60mm	75	20
MKF-063	63mm	74mm	75	20
MKF-075	75mm	89mm	75	20
MKF-100	100mm	116mm	60	20



Sanitary food grade couplings available individually or contact us for factory fitted custom hose assemblies.

RED WINE BEVERAGE

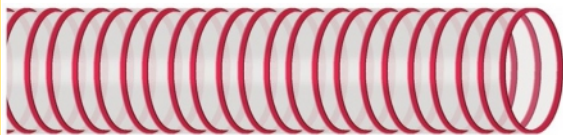

Food Grade PVC suction/discharge hose reinforced with a rigid spiral for the transfer of food products, including beer, wine, drinking water and milk. Resistant to chemicals used in cleaning and is UV light resistant. Suitable for the wine, bottling and food packaging industries.

It can be used for the suction of wine & spirits up to 28 1/4 proof. The smooth bore enables easy cleaning and reduces bacteria build up.

-5°C to +60°C



P/N	ID	OD	WP PSI	ROLL MT
RSH-025	25mm	34mm	100	20
RSH-032	32mm	41mm	100	20
RSH-038	38mm	48mm	85	20
RSH-050	50mm	62mm	75	20
RSH-063	63mm	76mm	75	20
RSH-075	75mm	90mm	75	20
RSH-100	100mm	117mm	60	20



PVC HOSE

MATERIALS HANDLING



MULCH BLOWER



High strength mulch/bark blowing hose that's flexible and durable. Provides visible and unrestricted service for landscaping material delivery of mulch, wood chips, gravels, straw and other landscaping materials in a wide range of environments where abrasion is present and service conditions are moderate. Excellent for low-pressure blowing applications. Clear PVC with red or black rigid PVC spiral construction. Full Rolls or cut lengths. -20°C to +70°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
MUL-100	100mm	113mm	15	FULL	30.48
MUL-125	125mm	142mm	15	FULL	30.48
MUL-150	150mm	169mm	15	FULL	30.48



HEAVY DUTY SUCTION



Heavy duty material handling hose with high abrasion resistance, extra flexibility & light-weight design. Used as an abrasive transfer or vacuum of dry bulk, slurry, salt, cement, fertilisers and a limited number of oil based products. Hose has a smooth black Poly/Nitrile blend tube & orange PVC spiral. Full rolls or cut lengths available. -10°C to +60°C

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
HDS-038	38mm	54mm	45	FULL	30
HDS-050	50mm	66mm	45	FULL	30
HDS-063	63mm	79mm	45	FULL	30
HDS-075	75mm	94mm	45	FULL	30
HDS-100	100mm	122mm	45	FULL	30
HDS-125	125mm	147mm	45	FULL	30
HDS-150	150mm	175mm	45	FULL	30
HDS-200	200mm	228mm	45	FULL	20



RANGE OF FITTINGS & CLAMPS AVAILABLE



READY **2** GO

PVC HOSE

SUCTION



AIR SEEDER



Medium duty flexible clear PVC hose with a black rigid PVC helix & smooth inner bore. Good chemical resistance with excellent abrasion resistance. Used as primary, secondary and tertiary air seeder lines, light duty suction or delivery of water. Conforms to AS/NZS 2070 (Plastics for food contact) UV stabilized. -5°C to +60°C.

* Also available in Urethane compound (PU) for additional abrasion resistance. POA.



P/N	ID	OD	WP PSI	ROLL MT
ASH-025	25mm	32mm	115	30
ASH-032	32mm	39mm	100	20
ASH-038	38mm	46mm	90	20
ASH-044	44mm	54mm	90	20
ASH-050	50mm	60mm	70	20
ASH-063	63mm	73mm	70	20
ASH-076	76mm	88mm	60	20

BARFLO® SUCTION HD



Medium to heavy duty vacuum and delivery hose with good flexibility. Secondary and tertiary lines on air seeder machines. Also suitable for water conveyance, ventilation duct on machines and dust collection applications. Transfer of small particulates, granules etc. UV light stabilised. -10°C to +60°C.




P/N	ID	OD	VACUUM	ROLL MT
BFL-032	32mm	42mm	FULL	20
BFL-038	38mm	49mm	FULL	20
BFL-044	44mm	58mm	FULL	20
BFL-050	50mm	68mm	FULL	20
BFL-063	65mm	79mm	FULL	20
BFL-076	76mm	92mm	FULL	20

MARINEFLEX®



Black smooth bore lightweight hose well suited as a discharge hose for bilge pumps, pond pumps & as waste hose for caravans or RV's. Can also be used as a lightweight air seeder, dust extraction duct or low voltage cable conduit. -10°C to +60°C

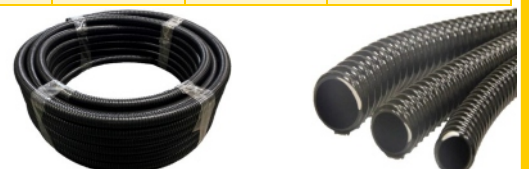

P/N	ID	OD	WP PSI	ROLL MT
MFL-020	20mm	25mm	100	20
MFL-025	25mm	30mm	100	20
MFL-028	28mm	33mm	100	20
MFL-032	32mm	37mm	90	20
MFL-038	38mm	43mm	60	20
MFL-050	50mm	55mm	60	20

PVC/RUBBER

MATERIALS HANDLING



ARVAC®



Continental Arvac® hose is used for a variety of abrasive material-handling & vacuum applications to transfer sand, gravel, cement, fly ash, glass, metals, plastic pellets, fertilizers, rock salts and slurries. Thermoplastic alloyed blend of polyurethane and PVC with (Static dissipating/ static conductive) tube, thermoplastic alloyed blend of nitrile, polyurethane and PVC static dissipating cover, rigid high-density PVC helix. Full rolls or cut lengths. -40°C to +70°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
ARV-038	38mm	48mm	40	FULL	30.48
ARV-050	50mm	63mm	40	FULL	30.48
ARV-063	63mm	78mm	35	FULL	30.48
ARV-075	75mm	94mm	30	FULL	30.48
ARV-100	100mm	122mm	30	FULL	30.48
ARV-125	125mm	147mm	30	FULL	30.48
ARV-150	150mm	180mm	25	FULL	30.48
ARV-200	200mm	234mm	20	FULL	6.1
ARV-250	250mm	285mm	20	FULL	6.1

* Ensure flow of material is in the direction of the arrow printed on the hose. Method of manufacturing results in the hose with a lower coefficient of friction and longer life when used in the proper direction.

INDUS®



Bulk material suction and low pressure delivery, gravity transfer hose specially designed for gravel, cement & abrasive materials. Has a black antistatic synthetic elastomer & black shock resistant thermoplastic elastomer reinforcement helix. -15°C to +60°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
IND-038	38mm	47mm	30	FULL	20
IND-050	50mm	61mm	30	FULL	20/30/50
IND-063	63mm	75mm	30	FULL	20/30
IND-075	75mm	90mm	15	FULL	20/30
IND-100	100mm	119mm	15	FULL	20/30
IND-125	125mm	146mm	15	FULL	20/30
IND-150	150mm	175mm	15	FULL	20/30



VACUUM FITTINGS AVAILABLE






TPR DUCTING



TPR ducting is constructed from a thermoplastic rubber compound with a high tensile wire helix reinforcement. An excellent general-purpose ducting with good abrasive qualities and UV resistance. Continuous encapsulated wire helix, black PVC tube, thermoplastic rubber compound cover. -40°C to +125°C

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
D-TPR-040	38mm	43mm	-	FULL	20
D-TPR-050	50mm	56mm	-	FULL	20
D-TPR-063	63mm	70mm	-	FULL	20
D-TPR-075	75mm	84mm	-	FULL	20
D-TPR-083	83mm	84mm	-	FULL	20
D-TPR-089	89mm	99mm	-	FULL	20
D-TPR-100	100mm	111mm	-	FULL	20
D-TPR-125	125mm	136mm	-	FULL	20
D-TPR-150	150mm	161mm	-	FULL	20
D-TPR-180	180mm	194mm	-	FULL	20
D-TPR-200	200mm	214mm	-	FULL	20

EOLO® DUCTING

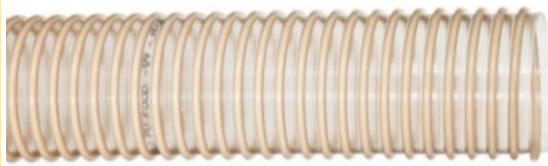

Polyurethane ducting reinforced with an anti-shock rigid PVC spiral incorporating an external anti-static wire. Light and flexible this ducting is ideal for the suction and discharge of abrasive powders, fumes, shavings, vapours, dry foods and heavy duty industrial and abrasive products. -20°C to +65°C.

* Also available in Anti-Static **D-EPUAS-XXX**

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
D-EPU-025	25mm	37mm	-	FULL	20
D-EPU-032	32mm	44mm	-	FULL	20
D-EPU-038	38mm	44mm	-	FULL	20
D-EPU-044	44mm	51mm	-	FULL	20
D-EPU-050	50mm	56mm	-	FULL	20
D-EPU-055	55mm	62mm	-	FULL	20
D-EPU-063	63mm	70mm	-	FULL	20
D-EPU-075	76mm	84mm	-	FULL	20
D-EPU-090	90mm	99mm	-	FULL	20
D-EPU-100	102mm	111mm	-	FULL	20
D-EPU-125	127mm	137mm	-	FULL	20
D-EPU-140	140mm	151mm	-	FULL	20
D-EPU-150	150mm	161mm	-	FULL	20
D-EPU-180	180mm <td 194mm	-	FULL	20	
D-EPU-200	203mm	214mm	-	FULL	20
D-EPU-250	254mm	265mm	-	FULL	20
D-EPU-300	305mm	315mm	-	FULL	10


CLAMPS

Range of clamps also available.






GREY DUCTING

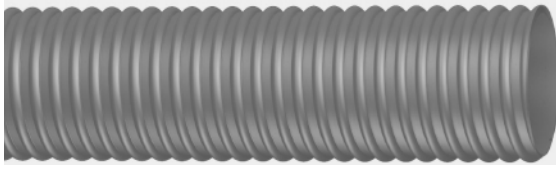

Grey PVC with rigid helix, easy to bend, light weight light duty vacuum of air, fumes, powders, gas, sawdust, aerating and in conditioning plants and wood working plants. Grey PVC with rigid helix. -20°C to + 60°C

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
D-PLA-040	38mm	45mm	-	FULL	20
D-PLA-050	50mm	61mm	-	FULL	20
D-PLA-063	63mm	72mm	-	FULL	20
D-PLA-075	75mm	87mm	-	FULL	20
D-PLA-089	89mm	102mm	-	FULL	20
D-PLA-100	100mm	113mm	-	FULL	20
D-PLA-125	125mm	140mm	-	FULL	20
D-PLA-150	150mm	166mm	-	FULL	20
D-PLA-200	200mm	217mm	-	FULL	20

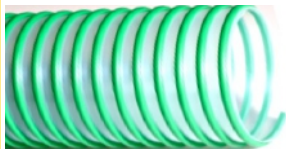

FLEXIBLE DUCTING

Other flexible ducting products also available on request for various applications including:

- * Wood & Paper
- * Chemical Fumes & Gases
- * Plastics, Particulates & Dust
- * Air Conditioning & Ventilation
- * Food, Grain & Pharmaceuticals
- * High Temp & Flame Retardant
- * Static Dissipating

Available in different compounds to suit specific applications:

- * Poly Vinyl Chloride
- * Thermoplastic Rubber
- * Silicon
- * Polyurethane
- * Polyethylene





CLEAR VINYL TUBING



Food grade PVC suitable for food & beverage fluids, medical drainage and low pressure general delivery lines where visibility is ideal. Non toxic tube manufactured to AS2070 1999 with excellent clarity, flexibility & smooth bore for low friction flow. -5°C to +60°C



P/N	ID	OD	WP PSI	ROLL MT
TCV-03	3mm	5mm/6mm	125	30/100/200
TCV-04	4mm	6mm	120	25/50/150
TCV-05	5mm	8mm	115	30/50/100
TCV-06	6mm	9mm	90	30/100
TCV-08	8mm	11mm	75	30/100
TCV-09	9mm	12mm	60	30/100
TCV-10	10mm	13mm	60	30/50/75
TCV-12	12mm	15mm	70	30/50
TCV-16	16mm	19mm	60	30
TCV-19	19mm	23mm	50	30
TCV-25	25mm	31mm	50	30
TCV-32	32mm	40mm	40	30
TCV-40	40mm	46mm	40	15/30
TCV-50	50mm	58mm	40	15

EVA BEVERAGE



Food grade EVA (Ethylene Vinyl Acetate) compound will not taint foodstuff and beverages. Good flexibility, a mirror smooth bore and excellent abrasion resistance. Dispensing beverages, including beer and mixed drinks. Transferring most fluid and semi fluid food. -5°C to +60°C



P/N	ID	OD	WP PSI	ROLL MT
EVA-0407	4mm	7mm	40	100
EVA-0508	5mm	8mm	40	100
EVA-0610	6mm	10mm	40	100
EVA-0812	8mm	12mm	40	100
EVA-1015	10mm	15mm	40	100
EVA-1217	12mm	17mm	40	100



Metal or plastic hose connections available.



TUBING

TUBING



LDPE PRESSURE TUBE



LDPE is ideal for transfer of air & liquids in industrial appliances. It is chemically inert and has excellent resistance to most solvents. LDPE has a wide range of uses in industry, agriculture, chemical plants and paper mills. It provides good resistance to most chemicals & ideal for pneumatic control installations and low pressure hydraulics where a low cost, flexible connection is required. Lightweight and flexible food contact to AS 2070 . -5°C to +60°C

* Available in Black (B) & Natural (N) standard

* Other colours available on request, MOQ may apply



P/N	ID	OD	WP PSI	ROLL MT
T-LDPE-004-100	2.6mm	4mm	116	100
T-LDPE-005-100	3.3mm	5mm	116	100
T-LDPE-006-100	4.0mm	6mm	116	100
T-LDPE-008-100	5.3mm	8mm	116	100
T-LDPE-010-100	6.6mm	10mm	116	100
T-LDPE-012-100	8.0mm	12mm	116	100
T-LDPE-3/16-100	0.124"	3/16"	116	100
T-LDPE-1/4-100	0.166"	1/4"	116	100
T-LDPE-3/8-100	0.250"	3/8"	116	100
T-LDPE-1/2-100	0.333"	1/2"	116	100
T-LDPE-5/8-100	0.500"	5/8"	116	100

PA NYLON TUBING



Transfer air & fluids for industrial or vehicle applications, POLYAMIDE tubing guarantees excellent durability due to its stable long-term mechanical properties. Imperial or metric OD tube, easy to install push-fit or compression fittings also available to suit. -5°C to +60°C.

* Also available in Natural, Red, Blue, Green & Yellow,



P/N	WALL	OD	WP PSI	ROLL MT
T-N1/8	0.48mm	1/8"	250	100
T-N3/16	0.79mm	3/16"	250	100
T-N1/4	1.02mm	1/4"	250	100
T-N3/8	1.47mm	3/8"	250	100
T-N1/2	1.93mm	1/2"	250	100
T-N5/8	1.65mm	5/8"	125	100
T-N4MM	0.7mm	4mm	290	100
T-N5MM	0.85mm	5mm	290	100
T-N6MM	1.0mm	6mm	290	100
T-N8MM	1.4mm	8mm	290	100
T-N10MM	1.7mm	10mm	290	100
T-N12MM	2.0mm	12mm	290	100

Range of tube fittings also available.



PVC HOSE

DISCHARGE



BLUE LAYFLAT



Medium duty **SUNNY®** quality **BLUE** PVC layflat hose with braided reinforcement for all water discharge applications used in farming, irrigation, construction & general industry. UV stabilized. -5°C to +60°C

Variety of hose couplings to suit layflat also available as individual items or as assemblies.



P/N	ID	WALL	WP PSI	ROLL MT
LFB-025	25mm	1.2mm	65	100
LFB-032	32mm	1.2mm	65	100
LFB-038	38mm	1.2mm	65	100
LFB-050	50mm	1.2mm	65	100
LFB-063	63mm	1.2mm	65	100
LFB-075	75mm	1.2mm	65	100
LFB-100	100mm	1.2mm	60	100
LFB-125	125mm	1.2mm	60	100
LFB-150	150mm	1.2mm	60	100
LFB-200	200mm	1.2mm	60	100
LFB-250	250mm	1.2mm	60	100
LFB-300	300mm	1.2mm	60	100



RED LAYFLAT



Heavy duty **SUNNY®** quality **RED** PVC layflat hose with braided reinforcement for all water discharge applications used in farming, irrigation, construction & general industry. UV stabilized. -5°C to +60°C

P/N	ID	WALL	WP PSI	ROLL MT
LFR-038	38mm	1.2mm	150	100
LFR-050	50mm	1.2mm	150	100
LFR-063	63mm	1.2mm	150	100
LFR-075	75mm	1.2mm	130	100
LFR-100	100mm	1.2mm	130	100
LFR-150	150mm	1.2mm	100	100
LFR-200	200mm	1.2mm	70	100



READY 2 GO

Factory fitted layflat hose assemblies with end connections of your choice, camlocks, stortz, bauer, travis, screwed & flange, etc.

MEASURING LAYFLAT—CHEAT SHEET

HOSE ID	20mm	25mm	32mm	38mm	50mm	65mm	75mm	100mm	125mm	150mm	200mm	250mm	300mm
FLAT MEASUREMENT	32mm	42mm	51mm	64mm	83mm	102mm	124mm	165mm	210mm	248mm	324mm	400mm	483mm



TRAVELLING IRRIGATOR



Oroflex BANDAMA premium quality layflat hose for drag irrigation systems & dredging. Special NBR rubber compound is UV & weather resistant with circular woven polyester nylon providing excellent kink resistance, low elongation & prevents snaking. 1A177 Compliant. -30°C to +80°C



P/N	ID	WALL	WP PSI	ROLL MT
RL-BAN-063	63mm	2.8mm	225	150/200
RL-BAN-076	76mm	3.1mm	200	150/200
RL-BAN-090	90mm	3.4mm	200	150/200
RL-BAN-100	100mm	3.6mm	200	150/200
RL-BAN-105	105mm	3.6mm	175	150/200
RL-BAN-114	114mm	3.7mm	175	100
RL-BAN-127	127mm	3.8mm	145	100
RL-BAN-152	152mm	3.8mm	145	100



OROFLEX® 10 & 20 BAF



Extruded rubber layflat hose designed & recommended for water transfer and general pumping duties in irrigation, mining, construction, sewage, draining systems, water bypass operations and cable sheaths. Made from circularly woven 100% high tenacity synthetic yarn, completely protected and locked-in by tough, highly resistant synthetic nitrile rubber & PVC blend extruded through the weave forming a single homogenous construction. Ribbed cover for max abrasion resistance. -30°C to +80°C

- OROFLEX 10 BLACK** - Medium Pressure
- OROFLEX 20 MUSTARD** - High Pressure
- OROFLEX 20 GREEN** - High Pressure

READY 



P/N	ID	WALL	WP PSI	ROLL MT
RL-ORO-038	38mm	2mm	200	100
RL-ORO-050	50mm	2mm	200	100/200
RL-ORO-063	63mm	2mm	200	100
RL-ORO-075	75mm	2.5mm	145	100
RL-ORO-100	100mm	2.5mm	145	20/100
RL-ORO-127	127mm	3mm	145	100
RL-ORO-150	150mm	3mm	145	20/100
RL-ORO-200	200mm	3mm	115	20/100
RL-ORO-20020	20mm	2mm	400	100
RL-ORO-20025	25mm	2.3mm	400	100
RL-ORO-20038	38mm	2.6mm	300	100
RL-ORO-20050	50mm	2.8mm	300	100
RL-ORO-20075	75mm	3.0mm	300	100
RL-ORO-20100	102mm	3.1mm	300	60/100/200
RL-ORO-20127	127mm	3.2mm	245	200
RL-ORO-20150	150mm	4.0mm	290	100/200
RL-ORO-20200	200mm	4.1mm	200	100
RL-ORO-20250	254mm	3.9mm	200	20/50/60
RL-ORO-20300	300mm	4.1mm	155	20/50/60

Factory fitted layflat hose assemblies with end connections of your choice, camlocks, stortz, bauer, screwed & flange.

RUBBER HOSE

DISCHARGE



OROFLEX® AQUA™



Oroflex AQUA premium quality layflat hose designed & recommended as a drinking water transfer hose in long lines and emergency delivery operations, liquid and powder food transfer, ship/boat drinking water supply, sewer and water treatment, pipeline bypass and waste transfer. Made from circularly woven 100% high tenacity synthetic yarn, completely protected and locked-in by a tough, highly resistant thermo-plastic polyurethane extruded through the weave, forming a single homogenous construction. -50°C to +65°C.

P/N	ID	WALL	WP PSI	ROLL MT
RL-AQUA-038	38mm	2mm	300	61
RL-AQUA-051	51mm	2mm	240	61/201
RL-AQUA-063	63mm	2.2mm	240	61/201
RL-AQUA-075	75mm	2.3mm	240	61/201
RL-AQUA-102	102mm	2.7mm	240	61/201



ARMTEX™



Designed and recommended for firefighting, especially in municipal fire departments, petrochemical and power plants, navies and other industrial services. Made from circularly woven 100% high tenacity synthetic yarn, completely protected and locked-in by tough, highly resistant synthetic nitrile rubber & PVC blend, extruded through the weave, forming a single homogenous construction. Ribbed cover for max abrasion resistance. -30°C to +80°C.

P/N	ID	WALL	WP PSI	ROLL MT
RL-ARMTEX-025	25mm	2mm	500	30
RL-ARMTEX-038	38mm	2mm	380	30
RL-ARMTEX-050	50mm	2mm	250	30
RL-ARMTEX-065	65mm	2.3mm	250	30



* Also available in Yellow 

Range of STORTZ couplings & clamps also available.



READY  GO

RUBBER HOSE

MULTI-PURPOSE



RED MULTI-PURPOSE



Variflex™ is a quality Continental® multi-purpose hose with an ARPM Class A (High Oil Resistance) tube and cover. This hose is ideal for industrial air service, compressor lines, pneumatic tools, low-pressure spray and many other applications where the need for oil resistance is high. It is non-conductive with a minimum electrical resistance greater than one (1) megohm per inch of length of hose at 1000 V DC. Full rolls or cut lengths available. -29°C to +99°C.

*Also available in **BLUE** 

P/N	ID	OD	WP PSI	ROLL MT
M-MPR-006	6mm	14mm	300	152.4
M-MPR-008	8mm	16mm	300	152.4
M-MPR-010	10mm	17mm	300	152.4
M-MPR-012	12mm	22mm	300	152.4
M-MPR-016	16mm	26mm	300	152.4
M-MPR-020	20mm	30mm	300	152.4
M-MPR-025	25mm	38mm	300	137.2
M-MPR-032	32mm	45mm	300	121.9
M-MPR-038	38mm	53mm	300	91.5
M-MPR-050	50mm	63mm	300	15

ORTAC® MULTI-PURPOSE



Ortac® (Oil-Resistant Tube and Cover) is our most popular premium-quality multipurpose hose. Used in the most abusive industrial applications, Ortac® will handle air, oil, water, kerosene and some chemicals. The premium Carbryn™ cover offers the most superior abrasion resistance of air and multipurpose hoses. Non-conductive, minimum electrical resistance greater than 1 megohm per inch of hose length at 1000 volts DC. Full rolls or cut lengths available. -29°C to +99°C.

P/N	ID	OD	WP PSI	ROLL MT
M-ORT-005	5mm	12mm	300	152.4
M-ORT-006	6mm	16mm	300	152.4
M-ORT-008	8mm	17mm	300	152.4
M-ORT-010	10mm	19mm	300	152.4
M-ORT-012	12mm	23mm	300	152.4
M-ORT-016	16mm	27mm	300	152.4
M-ORT-020	20mm	30mm	300	152.4
M-ORT-025	25mm	38mm	300	137.2
M-ORT-032	32mm	46mm	300	121.9
M-ORT-038	38mm	53mm	300	91.5

CUSTOM ASSEMBLIES

Hose assemblies made to order for your specific application. Just choose your connection type & material preference or contact us for expert technical advice to suit your fluid transfer requirements. **R2G**



20M CUT ROLLS
Convenient 20m cut roll lengths. **R2G**

50M CUT REELS
Convenient 50m cut plastic reels. **R2G**

READY **2** GO

RUBBER HOSE

MULTI-PURPOSE



GORILLA® MULTI-PURPOSE



Premium-quality Gorilla® multipurpose industrial hose has a wide range of applications used in manufacturing, construction, agriculture, quarries, mines, oil and gas industry. Nitrile synthetic rubber, ARPM class A (High Oil Resistance). All sizes are crush-resistant and rated at 500 psi. Premium Carbryn™ cover offers the superior abrasion resistance of air and multipurpose hoses. Non-conductive, min. electrical resistance greater than 1 megohm per inch of hose length at 1000 Volts DC. MSHA approved flame resistant cover. Full rolls or cut lengths available. -29°C to +88°C.

P/N	ID	OD	WP PSI	ROLL MT
M-GOR-006	6mm	15.5mm	500	152.4
M-GOR-008	8mm	17.5mm	500	152.4
M-GOR-010	10mm	18.6mm	500	152.4
M-GOR-012	12mm	22.6mm	500	152.4
M-GOR-016	16mm	27mm	500	152.4
M-GOR-020	20mm	30mm	500	152.4
M-GOR-025	25mm	38mm	500	137.2
M-GOR-032	32mm	45.6mm	500	121.9
M-GOR-038	38mm	52mm	500	91.5
M-GOR-050	50mm	66mm	500	15

AIR & WATER HOSE



Frontier® is an economical air and water hose with a ARPM class C (Limited Oil Resistance) EPDM tube and cover. It covers a wide range of industrial, construction and agricultural applications such as water lines, jack hammer & compressor lines. Available in 250 PSI with 4:1 safety factor. -40°C to +99°C.

* Also available in **RED** & **BLACK**



P/N	ID	OD	WP PSI	ROLL MT
M-GPY-010	10mm	18mm	300	152.4
M-GPY-012	12mm	21mm	300	152.4
M-GPY-020	20mm	29mm	300	152.4
M-GPY-025	25mm	37mm	300	137.2

PRE-MADE ASSEMBLIES R2G



20m hose assemblies fitted with safety type "A" claw couplings. Either 2-Bolt safety clamp or crimped ends. Custom lengths & fittings connections also available to suit any application. Just choose your size, length & connection type or contact IHF for assistance in choosing the right hose & connections for your requirements.

P/N	ID	OD	*WP PSI	ROLL MT
A-9389-020-020AS	20mm	29mm	300	20
A-9389-025-020AS	25mm	37mm	300	20

* Assemblies supplied with 300 PSI Working Pressure



* Crimped assemblies also available on request

READY 2 GO

RUBBER HOSE

AIR & WATER



BLACK GENERAL PURPOSE



Frontier® is an economical air and water hose with a ARPM class C (Limited Oil Resistance) EPDM tube and cover. It covers a wide range of industrial, construction and agricultural applications such as water lines, air & compressor lines. Full reels or cut lengths available. -40°C to +99°C.

* Also available in YELLOW (GPY)



P/N	ID	OD	WP PSI	ROLL MT
M-GPB-006	6mm	13mm	200	152.4
M-GPB-008	8mm	15mm	200	152.4
M-GPB-010	10mm	17mm	200	152.4
M-GPB-012	12mm	21mm	200	152.4
M-GPB-016	16mm	25mm	200	152.4
M-GPB-020	20mm	29mm	200	152.4
M-GPB-025	25mm	37mm	300	137.2

RED GENERAL PURPOSE



Frontier® is an economical air and water hose with a ARPM class C (Limited Oil Resistance) EPDM tube and cover. It covers a wide range of industrial, construction and agricultural applications such as water lines, air & compressor lines. Full reels or cut lengths available. -40°C to +99°C.

P/N	ID	OD	WP PSI	ROLL MT
M-GPR-005	5mm	11mm	200	152.4
M-GPR-006	6mm	13mm	200	152.4
M-GPR-008	8mm	15mm	200	152.4
M-GPR-010	10mm	17mm	200	152.4
M-GPR-012	12mm	21mm	200	152.4
M-GPR-016	16mm	25mm	200	152.4
M-GPR-020	20mm	29mm	200	152.4
M-GPR-025	25mm	37mm	200	137.2
M-GPR-032	32mm	44mm	200	121.9
M-GPR-038	38mm	50mm	200	91.5

CUSTOM ASSEMBLIES

Hose assemblies made to order for your specific application. Just choose your connection type & material preference or contact us for expert technical advice to suit your fluid transfer requirements. **R2G**



20M CUT ROLLS

Convenient 20m cut roll lengths. **R2G**

READY **2** GO



FRAS A/W DELIVERY



AS 2660 CLASS B

20 Bar/300 PSI Premium FRAS Air Water Delivery hose for applications requiring a heavy duty hose. For use in mining & applications requiring Fire Resistant Ant-Static properties. Synthetic rubber with two textile plies reinforcement. Full Rolls or cut lengths available. -20°C to +70°C.

P/N	ID	OD	WP PSI	ROLL MT
W-FRAD-012	12mm	23mm	300	20
W-FRAD-020	20mm	31mm	300	20
W-FRAD-025	25mm	37mm	300	20
W-FRAD-032	32mm	46mm	300	20
W-FRAD-038	38mm	52mm	300	20
W-FRAD-050	50mm	67mm	300	20
W-FRAD-065	65mm	80mm	300	20
W-FRAD-075	75mm	93mm	300	20
W-FRAD-100	100mm	119mm	300	20
W-FRAD-150	150mm	170mm	300	20

FRAS A/W SUCTION



AS 2660 CLASS C


10 Bar/150 PSI Premium FRAS (Fire Resistant Anti-Static) air water suction delivery hose for applications requiring a heavy duty hose. For use in mining & applications requiring FRAS properties. Synthetic rubber with two textile plies reinforcement & wire helix. Full rolls or cut lengths available . -20°C to +70°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-FRAS-050	50mm	61mm	150	FULL	20
W-FRAS-065	65mm	75mm	150	FULL	20
W-FRAS-075	75mm	88mm	150	FULL	20
W-FRAS-100	100mm	116mm	150	FULL	20
W-FRAS-150	150mm	170mm	150	FULL	20

* Also available, FRAS AS 1802—2660 Cable trailing protection hose. POA.



CUSTOM ASSEMBLIES

Hose assemblies made to order for your specific application. Just choose your connection type & material preference or contact us for expert technical advice to suit your fluid transfer requirements. 



Quality camlock couplings, fittings, whip checks & hose restraints also available to suit your specific application.



HEAVY DUTY AIR WATER




Premium Continental® Heavy Duty 300 PSI air water for delivery applications including mining, construction, quarries, coal prep washing & manufacturing plants where severe operation & higher pressures are required. Full rolls or cut lengths. -32°C to +88°C.



P/N	ID	OD	WP PSI	ROLL MT
W-ADB-012	12mm	23mm	300	20
W-ADB-020	19mm	31mm	300	20
W-ADB-025	25mm	38mm	300	20
W-ADB-032	32mm	44mm	300	20
W-ADB-038	38mm	51mm	300	20
W-ADB-050	51mm	65mm	300	20
W-ADB-065	63mm	76mm	300	20
W-ADB-075	75mm	90mm	300	20

BLAST LOADING HOSE

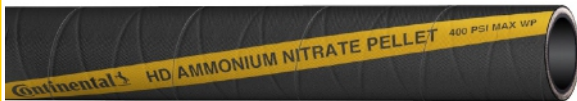

Premium Continental® hose designed for ANFO (Ammonium Nitrate - NH_4NO_3) slurry delivery.

CAUTION: This hose is not intended for pneumatic loading of ammonium nitrate pellets and other dry explosive materials. Hose is specially reinforced with spiral-ply fabric, double helix wire, & longitudinal strap for additional tensile strength against pulling.

-32°C to +93°C.



P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-BLH-038	38mm	52mm	300	FULL	80/122
W-BLH-050	50mm	64mm	300	FULL	80/122

SLURRY DE-WATERING



Premium Continental® hose designed for cleaning and removing water from blasting holes, prior to loading with explosives, & transfer of slurries.

Black Nitrile (static dissipating) tube & black static dissipating SBR cover. Specially reinforced with spiral-ply fabric, double helix wire, & imbedded longitudinal strap for additional tensile strength against pulling. -32°C to +93°C.



P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-SDW-065	63mm	83mm	250	FULL	122
W-SDW-075	75mm	96mm	250	FULL	90

RUBBER HOSE

MATERIALS HANDLING



HOT AIR BLOWER



Continental® Premium hot air blower hose designed to transfer hot, non-oily air (to +204°C) from manifold blowers or in-plant compressors to holding tanks used in the transfer of dry bulk materials. Black EPDM Super Thermo-Flo (STF) compound, textile plies with double wire helix reinforcement. Full rolls or cut lengths. -40°C to +204°C.

P/N	ID	OD	WP PSI	ROLL MT
W-HAB-075	75mm	90mm	100	30.48
W-HAB-100	100mm	118mm	100	30.48



BULK FOOD HANDLING



Exstatic® is primarily a dry food transfer hose for tank truck and/or in-plant conveyance of dry, bulk foodstuffs like grains, flour, pellets, etc. where there is a potential for electrical static build-up. UHMWPE (FDA/USDA compliant) static dissipating/static conductive tube. -32°C to +82°C.

* POA & MOQ's apply.

P/N	ID	OD	WP PSI	ROLL MT
W-BFH-050	50mm	64mm	150	30
W-BFH-075	75mm	90mm	150	30
W-BFH-100	100mm	117mm	150	30
W-BFH-125	125mm	144mm	150	30



SANDBLAST



Heavy-duty hose for steel shot or sand blasting in cleaning or finishing metal, stone, glass or other surfaces. Chemituf™ synthetic rubber (static dissipating/static conductive) tube compound, textile plies reinforcement. -32°C to +82°C.

P/N	ID	OD	WP PSI	ROLL MT
W-SBH-012	12mm	28.7mm	150	30
W-SBH-020	750mm	37.6mm	150	30
W-SBH-025	25mm	47.8mm	150	30
W-SBH-032	32mm	54.9mm	150	30
W-SBH-038	38mm	60.5mm	150	30
W-SBH-050	50mm	72.6mm	150	30





BULK HANDLING



Continental® premium black softwall hose can be used for the discharge of dry bulk cement, sand, gravel, fly ash, glass, plastic, & other abrasive materials from tank truck & in-plant service. Available in 5mm (3/16”) & 6mm (1/4”) tube thickness. Chemituf® Synthetic Rubber (static dissipating / static conductive) superior abrasion resistance. Full rolls or cut lengths. -32°C to +82°C.

P/N	ID	OD	TUBE	WP PSI	ROLL MT
W-DCH-100	100mm	116mm	5mm	75	30.48
W-DCH6-100	100mm	118mm	6mm	50	30.48
W-DCH-125	125mm	142mm	5mm	75	30.48



MUFF COUPLING HOSE



An abrasive slurry hose to be used in conjunction with split muff couplings (also available). The hose has the high strength needed to handle pressure or suction service in the transfer of dry bulk, slurry, salt, cement, fertilisers and a limited number of oil based products. -20°C to +70°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-MCH-050	50mm	69mm	100	FULL	30
W-MCH-075	100mm	66mm	100	FULL	30
W-MCH-100	100mm	126mm	100	FULL	30
W-MCH-125	125mm	151mm	100	FULL	30
W_MCH-150	150mm	182mm	100	FULL	30
W-MCH-200	200mm	235mm	100	FULL	30
W_MCH-250	250mm	285mm	100	FULL	30
W_MCH-300	300mm	343mm	100	FULL	20

MUFF COUPLINGS



Muff coupling with full integrated sleeve with standard table D flanges. Can also be supplied with other table drillings. Maximum working pressure 100psi (0.69 Mpa). Includes bolt kit.

P/N	HOSE	HOLES	TABLE	PCD	BOLT
F-MCC-050	50mm	4	D	114MM	M12x70
F-MCC-075	75mm	4	D	146MM	M12x70
F-MCC-100	100mm	8	D	178MM	M12x70
F-MCC-125	125mm	8	D	210MM	M12x70
F-MCC-150	150mm	8	D	235MM	M12x70
F-MCC-200	200mm	8	D	292MM	M16x80
F-MCC-250	250mm	8	D	356MM	M20x100
F-MCC-300	300mm	12	D	406MM	M20x100

RUBBER HOSE

CONCRETE



CONCRETE TEXTILE



Continental® ContiTech ALLCRETE™ TEXTILE with **SURVIVOR®** for use in plaster, grout and shotcrete applications, handling a multitude of materials being pumped to concrete structures, dams, tunnel faces, swimming pools, etc. As a flexible connection between pumping equipment and hard piping. Exceeds ASME B30.27-2009. 2:1 WP to burst ratio. -30°C to +82°C.

P/N	ID	OD	WP PSI	ROLL MT
W-ACT-050	50mm	71mm	1233	10/20/30
W-ACT-065	65mm	86mm	1233	10/20/30
W-ACT-075	75mm	100mm	1233	10/20/30
W-ACT-090	90mm	114mm	1233	10/20/30
W-ACT-100	100mm	126mm	1233	10/20/30



CONCRETE STEEL



Continental® ContiTech ALLCRETE™ WIRE with **SURVIVOR®** for use in plaster, grout and shotcrete applications, handling a multitude of materials being pumped to concrete structures, dams, tunnel faces, swimming pools, etc. As a flexible connection between pumping equipment and hard piping. Exceeds ASME B30.27-2009. 2:1 WP to burst ratio. -30°C to +82°C.

P/N	ID	OD	WP PSI	ROLL MT
W-ACW-050	50mm	76mm	1233	10/20/30
W-ACW-065	65mm	89mm	1233	10/20/30
W-ACW-075	75mm	101mm	1233	10/20/30
W-ACW-090	90mm	115mm	1233	10/20/30
W-ACW-100	100mm	127mm	1233	10/20/30
W-ACW-125	125mm	152mm	1233	10/20/30




CONCRETE G820 SUPER




Continental® ContiTech G820 Super Concrete Delivery is a premium quality hose with thicker tube compound for heavy duty/high pressure concrete placement applications in concrete structures, dams, tunnel faces etc. Ideal for use on all pumping equipment. Exceeds ASME B30.27-2009. 2:1 WP to burst ratio. -30°C to +82°C.

P/N	ID	OD	WP PSI	ROLL MT
W-G820-075	75mm	mm	1233	10/20/30
W-G820-090	75mm	mm	1233	10/20/30
W-G820-100	100mm	mm	1233	10/20/30

CONCRETE HOSE ASSEMBLIES

Hose assemblies made to order with special hardened shouldered Victaulic hose ends perfectly matched to the hose for reliable, safe & longer operation. 

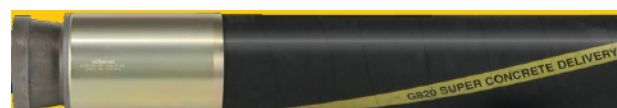

READY  GO



SURVIVOR® compound offers *TWICE* the abrasion resistance over standard compounds to outperform your current SBR hose




VACUUM



Continental® Hydrovator™ is a rugged yet lightweight hose designed exclusively for hydrovac operations. Combines the best in lightweight design and durability. Static dissipating Chemituf® tube handles the toughest hydro excavation jobs. The unique corrugated SBR cover provides superior flexibility in all applications. Textile plies & double wire helix reinforcement. All sizes are rated for full vacuum. Full rolls or cut lengths. -32°C to +82°C.


P/N	ID	OD	BEND R	VACUUM	ROLL MT
W-RBH-125	127mm	149mm	254	FULL	30.48
W-RBH-150	150mm	175mm	305	FULL	30.48
W-RBH-200	203mm	226mm	406	FULL	30.48
W-RBH-250	254mm	279mm	508	FULL	30.48

GREEN HORNET



Continental® Hornet XF is a medium-duty, lightweight construction hose that retains flexibility in cold weather. The smooth-bore tube minimizes material build-up and resists a variety of chemicals found in agricultural and sanitary industries. Slightly corrugated outer helix promotes abrasion resistance, low coefficient of friction allows ease of handling & dragging of the hose. Common uses can be found in waste management, construction, agricultural, marine and manufacturing industries. Combines the best in lightweight design and durability with thermo-plastic tube & cover with rigid lime green polyethylene helix. 50 PSI WP with 3:1 safety factor. Full rolls or cut lengths. -40°C to +82°C.

P/N	ID	OD	BEND R	VACUUM	ROLL MT
W-GRH-032	32mm	39mm	63.5mm	FULL	30.48
W-GRH-038	38mm	45mm	76.2mm	FULL	30.48
W-GRH-050	50mm	61mm	101.6mm	FULL	30.48
W-GRH-075	75mm	88mm	127mm	FULL	30.48
W-GRH-100	100mm	118mm	228.6mm	FULL	30.48
W-GRH-150	150mm	171mm	508mm	FULL	30.48

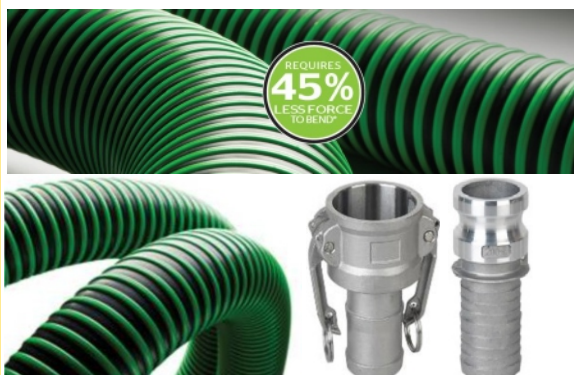



EXTREMEFLEX® WATER



Extremely flexible & lightweight general purpose water suction & delivery hose ideal for industrial water service, suction, discharge, and many other applications requiring a lightweight flexible easy to handle hose. EPDM rubber with textile plies reinforcement & double steel wire helix, corrugated cover. Full rolls or cut lengths available. -32°C to +93°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-EXTW-025	25mm	35mm	150	FULL	30
W-EXTW-032	32mm	41mm	150	FULL	30
W-EXTW-038	38mm	47mm	150	FULL	30
W-EXTW-050	50mm	60mm	150	FULL	30
W-EXTW-065	65mm	75mm	150	FULL	30
W-EXTW-075	75mm	88mm	150	FULL	30
W-EXTW-100	102mm	114mm	150	FULL	30
W-EXTW-150	150mm	166mm	150	FULL	3/6/30
W-EXTW-200	203mm	224mm	150	FULL	3/6/30
W-EXTW-250	254mm	278mm	150	FULL	3
W-EXTW-300	305mm	333mm	150	FULL	3

Genuine 4:1 Safety Factor!

ExtremeFlex® Versiflo

Premium Water Suction & Discharge Hose

A light to medium general-purpose water suction and delivery hose, suitable for various industrial, agricultural and construction areas.

- ▶ More Flexible: Easier to move in and out of tight spaces and around corners.
- ▶ Lighter Weight: Easier to lift and carry, resulting in fewer workplace injuries.
- ▶ Lower Force to Bend: Easier to connect and disconnect for increased productivity
- ▶ Improved Flex Performance: More durable and longer lasting



It's advanced formulation and construction creates an incredibly durable hose at a great value.

CUSTOM ASSEMBLIES

Hose assemblies made to order for your specific application. Just choose your connection type & material preference or contact us for expert technical advice to suit your fluid transfer requirements. **R2G**



Quality couplings also available to suit your application.




WATER DELIVERY



Premium water delivery hose ideal for industrial water service, discharge, and many other applications requiring a heavy duty hose. Synthetic rubber with two textile plies reinforcement. Full Rolls or cut lengths available. -20°C to +70°C.

P/N	ID	OD	WP PSI	ROLL MT
W-WDE-020	20mm	30mm	150	30
W-WDE-025	25mm	35mm	150	30
W-WDE-032	32mm	42mm	150	30
W-WDE-038	38mm	48mm	150	30/60
W-WDE-050	50mm	61mm	150	30/60
W-WDE-065	63mm	74mm	150	30
W-WDE-075	75mm	90mm	150	30/60
W-WDE-090	89mm	103mm	150	30
W-WDE-100	100mm	114mm	150	30/60
W-WDE-125	127mm	140mm	150	30
W-WDE-150	150mm	165mm	150	30
W-WDE-200	203mm	215mm	150	30

WATER SUCTION




Premium water suction / delivery hose ideal for industrial water service, pump inlet suction lines, and many other applications requiring a heavy duty hose. Synthetic rubber with two textile plies reinforcement & steel wire helix for full vacuum applications. Full rolls or cut lengths available. -20°C to +70°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-WSP-020	20mm	31mm	150	FULL	30
W-WSP-025	25mm	36mm	150	FULL	30/60
W-WSP-032	32mm	43mm	150	FULL	30/60
W-WSP-038	38mm	49mm	150	FULL	30/60
W-WSP-050	50mm	63mm	150	FULL	30/60
W-WSP-065	63mm	77mm	150	FULL	30/60
W-WSP-075	75mm	89mm	150	FULL	30/60
W-WSP-090	89mm	103mm	150	FULL	30
W-WSP-100	100mm	118mm	150	FULL	30
W-WSP-114	114mm	132mm	150	FULL	30
W-WSP-125	127mm	146mm	150	FULL	30
W-WSP-150	150mm	170mm	150	FULL	30
W-WSP-200	203mm	223mm	150	FULL	30



CUSTOM ASSEMBLIES

Hose assemblies made to order for your specific application. Just choose your connection type & material preference or contact us for expert technical advice to suit your fluid transfer requirements. 



Quality camlock couplings also available to suit your application from economical to premium with safety lock cam arms for added security, AL, PP, SS, BR, NY material selection.

RUBBER HOSE

STEAM



STEEL STEAM



For cleaning, heat control, pumping, thawing, blow-out service, steam pumps and hoists in open -end or permanent installation operations. It is used in refineries, shipyards, chemical plants, steel mills, foundries and heavy industrial applications where high strength is required and where severe environmental conditions are encountered. Full rolls or assemblies available. -29°C to +232°C.

Now with 20:1 Safety Factor

P/N	ID	OD	WP PSI	ROLL MT
W-PSH-012	12mm	27mm	250	30/60
W-PSH-020	20mm	32.5mm	250	30/60
W-PSH-025	25mm	41.4mm	250	30/60
W-PSH-032	32mm	48mm	250	15
W-PSH-038	38mm	54mm	250	15
W-PSH-050	50mm	65.5mm	250	15

* Genuine 20:1 safety factor = 5000 PSI Min Burst Pressure (MBP)


STEAM HOSE ASSEMBLIES



Factory fitted steam hose assemblies Ready-2-Go in 15M, 20M & 30M lengths, or made to order for your specific requirements. **R2G**

P/N	ID	OD	WP PSI	LENGTH
A-PSH-020-15M	20mm	32.5mm	250	15M
A-PSH-020-20M	20mm	32.5mm	250	20M
A-PSH-020-30M	20mm	32.5mm	250	30M
A-PSH-025-15M	25mm	41.4mm	250	15M
A-PSH-025-20M	25mm	41.4mm	250	20M
A-PSH-025-30M	25mm	41.4mm	250	30M

Steam Fitting Options

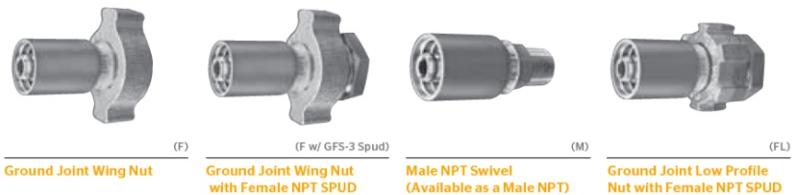

READY **2** GO

RUBBER HOSE

WASHDOWN



FORTRESS BLUE FDA



Fortress® is a high-quality hose construction for hot water up to +99°C Washdown service in food processing plants, dairies, bottling plants, breweries, canneries and abattoirs. Super abrasion and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of the Conti Blue Fortress® 300 hose incorporates Microban's® antimicrobial built-in product protection. White FDA compliant tube. -29°C to +99°C.

* Fitted TECPRO reels available

P/N	ID	OD	WP PSI	ROLL MT
M-FOR-012B	12mm	23mm	300	152.4
M-FOR-020B	20mm	30mm	300	152.4
M-FOR-025B	25mm	38mm	300	152.4

NB: This product does not contain any Phthalates listed in the REACH SVHC list



RB65® washdown guns available.

FORTRESS YELLOW



Fortress® is a high-quality hose construction for hot water up to +99°C Washdown service in food processing plants, dairies, bottling plants, breweries, canneries and abattoirs. Super abrasion and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of the Conti Yellow Fortress® 300 hose incorporates Microban's® antimicrobial built-in product protection. -29°C to +99°C.

Ball valve nozzle also available.

P/N	ID	OD	WP PSI	ROLL MT
M-FOR-012Y	12mm	23mm	300	152.4
M-FOR-020Y	20mm	30mm	300	152.4
M-FOR-025Y	25mm	38mm	300	152.4

NB: This product does not contain any phthalates listed in the REACH SVHC list



FORTRESS WHITE



Fortress® is a high-quality hose construction for hot water up to +99°C Washdown service in food processing plants, dairies, bottling plants, breweries, canneries and abattoirs. Super abrasion and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. -29°C to +99°C.

* Also available in Red




P/N	ID	OD	WP PSI	ROLL MT
M-FOR-012W	12mm	23mm	300	152.4
M-FOR-020W	20mm	30mm	300	152.4
M-FOR-025W	25mm	38mm	300	152.4

NB: This product does not contain any phthalates listed in the REACH SVHC list



HOSE ASSEMBLIES

READY **2** GO




Hose assemblies made to order for your specific application.

DINGA® washdown guns available, contact us for expert technical advice to suit your cleaning requirements. **R2G**



SANI-WASH™ SUPREME




Sani-Wash™ Supreme 300 is a high-quality hose construction for hot water up to +99°C washdown service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries. The EPDM cover incorporates Microban's® anti-microbial built-in product protection. White FDA compliant tube. -29°C to +99°C.

P/N	ID	OD	WP PSI	ROLL MT
M-SANI-012	12mm	21mm	300	152.4
M-SANI-020	20mm	30mm	300	152.4
M-SANI-025	25mm	37mm	300	152.4

* This product does not contain any Phthalates listed in the REACH SVHC listing.



RED WASHDOWN



Economical red washdown hose 300 PSI for commercial & industrial applications. Oil & fat resistant red outer cover for long service life. -29°C to +99°C.

P/N	ID	OD	WP PSI	ROLL MT
M-MPR-012	12mm	22mm	300	152.4
M-MPR-020	20mm	30mm	300	152.4
M-MPR-025	25mm	38mm	300	152.4

*Also available in BLUE 



Ideal for colour coding washdown systems in the workplace

FORTRESS YELLOW 3000




Fortress® high pressure washer hose is for use on pressure washer machines with working pressures up to 3000 PSI. Applications include HP cleaning service in food processing plants, dairies, packing houses, bottling plants, breweries. Super abrasion and oil-resistant cover provides maximum protection against the adverse affects of oil and animal fats. The cover of our Fortress® wash-down hose incorporates Microban® antimicrobial built-in product protection and also has an ARPM Class A rating for high oil resistance. -29°C to +99°C.

P/N	ID	OD	WP PSI	ROLL MT
M-FOR-010YHP	10mm	18mm	3000	152.4
M-FOR-012YHP	12mm	21mm	3000	152.4



HOSE ASSEMBLIES

Hose assemblies made to order for your specific application. 1 Mtr, 10Mtr, 15Mtr, 20Mtr, 30Mtr & custom lengths also available. Contact us for pricing & technical advice. 

RUBBER HOSE

PRESSURE WASHER



NEPTUNE 6000



Neptune Pressure Washer designed for pressure washer equipment & washdown service for wide range of industrial & commercial applications to 6000 PSI working pressures. -29°C to +121°C.

** Gun, lance & nozzle accessories also available.*



P/N	ID	OD	WP PSI	ROLL MT
M-NEP6-006	6mm	14mm	6000	152.4
M-NEP6-010	10mm	18mm	6000	140



NEPTUNE 3000



Neptune Pressure Washer designed for pressure washer equipment & washdown service for wide range of industrial & commercial applications to 3000 PSI working pressures. Also ideal for carpet cleaner machines. -29°C to +121°C.

** Turbo, spray nozzles & bend restrictors available.*



P/N	ID	OD	WP PSI	ROLL MT
M-NEP3-006	6mm	14mm	3000	152.4
M-NEP3-010	10mm	18mm	3000	152.4



HOSE ASSEMBLIES

Hose assemblies made to order for your specific application.

1 Mtr, 10Mtr, 15Mtr, 20Mtr, 30Mtr & custom lengths also available.

Contact us for pricing & technical advice. **R2G**



READY 2 GO

RUBBER HOSE

CARPET CLEANING




NEPTUNE 3000



Neptune Carpet Cleaner hose designed for pressure washer & carpet cleaning equipment up to 3000 PSI Working Pressures. Lightweight & flexible with wire reinforcement for durability. Blue NON-MARKING cover. Comes in standard carpet cleaning lengths & custom lengths also available POA. -29°C to +121°C.

** Accessories also available*

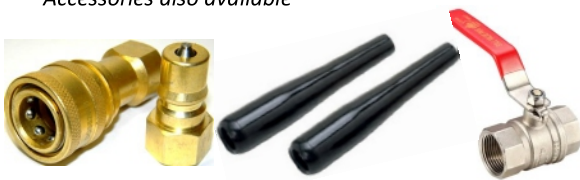

** Repairs & Re-ends while you wait.*



P/N	ID	OD	WP PSI	LENGTH
M-NEP-006-WHIP	6mm	14mm	3000	300mm
M-NEP-006-07.5	6mm	14mm	3000	7.5M
M-NEP-006-015	6mm	14mm	3000	15M
M-NEP-006-020	6mm	14mm	3000	20M
M-NEP-006-025	6mm	14mm	3000	25M
M-NEP-006-030	6mm	14mm	3000	30M
M-NEP-006-060	6mm	14mm	3000	60M
M-NEP-006-076	6mm	14mm	3000	76M
M-NEP-006-100	6mm	14mm	3000	100M
M-NEP-006-152	6mm	14mm	3000	152M



HOSE ASSEMBLIES

Hose assemblies made to order for your specific application. **R2G**
300mm, 1M, 7.5M, 10M, 15M, 20M, 30M, 60M, 100M & custom lengths also available, factory assembled for superior performance.

READY 2 GO



EXTREMEFLEX™ FOOD



Continental® ExtremeFlex™ Food Grade is for both dry food transfer and liquid transfer. Meets FDA, USDA & 3-A Sanitary Standard. A high-tech, flexible corrugated hose with pretzel-like agility & proven performance. Lightweight & easy to bend. -40°C to +93°C.

- * Easier to move in and out of tight spaces and around sharp corners.
- * Easier to lift and carry, so there are fewer workplace injuries.
- * Easier to connect and disconnect, keeping productivity high.
- * Ideal for demanding service of transferring products in wineries & breweries.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-EXTF-025	25mm	37mm	150	FULL	30.48
W-EXTF-032	32mm	42mm	150	FULL	30.48
W-EXTF-038	38mm	49mm	150	FULL	30.48
W-EXTF-050	50mm	62mm	150	FULL	30.48
W-EXTF-063	63mm	78mm	150	FULL	30.48
W-EXTF-075	75mm	91mm	150	FULL	30.48
W-EXTF-100	100mm	117mm	150	FULL	30.48




VINTNER™ BEVERAGE



Vintner™ Reserve is primarily for liquid transfer. For handling in-plant and/or tank truck transfer of wine, beer, portable water and other non-oily liquid foodstuffs. Meets FDA, USDA & 3-A Sanitary Standard 18-03 Certificate #3737. The mono-filament helix is a rust proof and crush-resistant alternative to traditional soft wall or steel wire reinforced hoses. Chlorobutyl Rubber tube meets FDA, USDA & 3-A sanitary Standard 18-03 Certificate #3737. -34°C to +104°C

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-VIN-025	25mm	40mm	250	FULL	30.48
W-VIN-038	38mm	52mm	250	FULL	30.48
W-VIN-050	50mm	66mm	250	FULL	30.48
W-VIN-063	63mm	80mm	250	FULL	30.48
W-VIN-075	75mm	97mm	250	FULL	30.48

MONOFILAMENT reinforcement allows the hose to operate under suction & delivery with the benefits of lighter weight, excellent flexibility, rust proof & kink / crush proof hose.

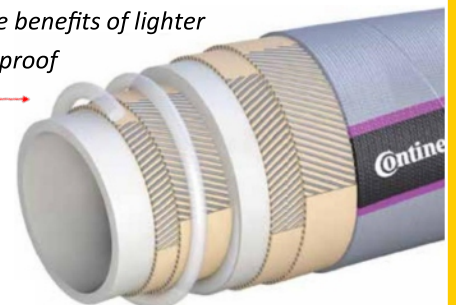

FOOD GRADE FITTINGS

Range of food grade / sanitary connections available to compliment our premium quality food grade hoses.



CUSTOM ASSEMBLIES





EXTREMEFLEX™ BEVERAGE



Continental® ExtremeFlex™ Beverage is ideal for beer, wine, distillery and beverage transfer processing facilities. For applications requiring flexible and/ or tight bend connections with proven performance. White Chlorobutyl (FDA / USDA compliant & conforms to 3-A sanitary standard 18-03). -32°C to +104°C.

- › Full suction & high working pressure
- › Better bend radius
- › Non-phthalates compound
- › EZ clean cover for added abrasion resistance

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-EXTB-025	25mm	39mm	250	FULL	30.48
W-EXTB-038	38mm	52mm	250	FULL	30.48
W-EXTB-050	50mm	64mm	250	FULL	30.48
W-EXTB-063	63mm	78mm	200	FULL	30.48
W-EXTB-075	75mm	91mm	200	FULL	30.48
W-EXTB-100	100mm	117mm	150	FULL	30.48

UHMWPE cover is ideal for applications where ease of cleaning. EZ drag with a low coefficient of friction and added abrasion resistance.



RED BREWERS DELIVERY



Ideal for transfer of wine, beer, potable water and other non-oily liquid foodstuffs. Max 50% proof sterilize with 5% soda solution. Crush proof with distinct RED cover. White NR tube meets FDA, USDA & 3-A sanitary standard 18-03 Certificate #3737 & IANESCO type approval for liquid food transfer. -30°C to +80°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-RBD-025	25mm	37mm	150	FULL	30.48
W-RBD-038	38mm	50mm	150	FULL	30.48
W-RBD-050	50mm	65mm	150	FULL	30.48
W-RBD-075	75mm	92mm	150	FULL	30.48

NO WIRE reinforcement allows the hose to be lighter weight, have excellent flexibility, rust proof & be kink / crush resistant.

PHthalate & BPA FREE

2004/1831 EC
2006/2023 EC

FDA
TITLE 21

Goes Great With Beer.





EXTREMEFLEX™ PETROLEUM




Extremely flexible and lightweight drop hose for use in tank truck and in-plant operation to transfer diesel, ethanol, gasoline, oil and petroleum-based products with up to 50% aromatic content. It has a corrugated construction for lower drag coefficient and superior abrasion resistance. Nitrile synthetic rubber (ARPM class A (Very High Oil Resistance) tube. Wire helix & textile reinforced. -40°C to +93°C.



P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-EXTP-020	20mm	31mm	250	FULL	30.48
W-EXTP-025	25mm	37mm	250	FULL	30.48
W-EXTP-032	32mm	43mm	250	FULL	30.48
W-EXTP-038	38mm	49mm	250	FULL	30/60
W-EXTP-044	44mm	56mm	250	FULL	30/120
W-EXTP-050	50mm	62mm	250	FULL	30/60
W-EXTP-065	65mm	76mm	200	FULL	30.48
W-EXTP-075	75mm	89mm	200	FULL	30/60
W-EXTP-090	90mm	104mm	150	FULL	30.48
W-EXTP-100	100mm	115mm	150	FULL	30/60
W-EXTP-150	150mm	168mm	150	FULL	30.48

ExtremeFlex Competitive Advantages

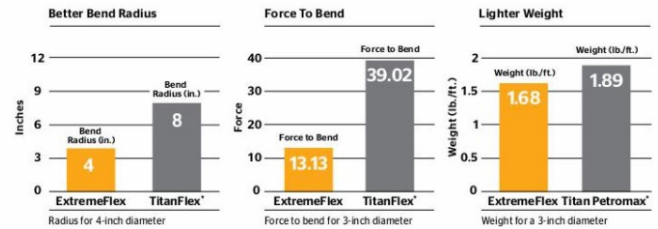

*TitanFlex® and Titan Petromax are products of Titan Industries, Inc.

PREMIUM OIL SUCTION



Premium oil suction & delivery hose for general purpose service conveying petroleum, oil & other petroleum based products. Hose is designed for pressure, gravity flow or suction service. Nitrile synthetic rubber (ARPM Class A (Very High Oil Resistance) tube & cover with wire helix reinforcement. -20°C to +70°C.



ASSEMBLIES

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-OSH-020	20mm	29mm	150	FULL	30
W-OSH-022	22mm	32mm	150	FULL	20
W-OSH-025	25mm	36mm	150	FULL	30/60
W-OSH-032	32mm	43mm	150	FULL	30/60
W-OSH-035	35mm	46mm	150	FULL	20
W-OSH-038	38mm	49mm	150	FULL	30/60
W-OSH-045	45mm	56mm	150	FULL	20
W-OSH-050	50mm	63mm	150	FULL	30/60
W-OSH-057	57mm	68mm	150	FULL	20
W-OSH-063	65mm	77mm	150	FULL	30/60
W-OSH-070	70mm	82mm	150	FULL	20
W-OSH-075	75mm	89mm	150	FULL	30/60
W-OSH-090	90mm	104 mm	150	FULL	20
W-OSH-100	100mm	118mm	150	FULL	30
W-OSH-150	150mm	170mm	150	FULL	30



PREMIUM OIL DELIVERY



Premium oil delivery hose for general purpose conveying diesel, oil & other petroleum based products in pressure & gravity flow service. Nitrile synthetic rubber (ARPM Class A (Very High Oil Resistance) tube & cover with textile braid reinforcement. -20°C to +70°C.

P/N	ID	OD	WP PSI	ROLL MT
W-ODH-020	20mm	29mm	150	30/60
W-ODH-025	25mm	38mm	150	30/60
W-ODH-032	32mm	44mm	150	30/60
W-ODH-038	38mm	51mm	150	30/60
W-ODH-045	44mm	56mm	150	30
W-ODH-050	50mm	61mm	150	30/60
W-ODH-065	65mm	74mm	150	30
W-ODH-075	75mm	88mm	150	30/60
W-ODH-100	100mm	113mm	150	30

HOT TAR BITUMEN



For the transfer of high temperature petroleum based materials such as tar, asphalt / bitumen & hot oils. Suitable for suction and discharge service on tank trucks, tank cars or at bulk stations. Heat resistant tube and Flexten® reinforcement with wire helix. (Hot oils only rated to 93°C). -32°C to +177°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-HTB-038	38mm	53mm	150	FULL	30.48
W-HTB-050	50mm	66mm	150	FULL	30.48
W-HTB-065	65mm	79mm	150	FULL	30.48
W-HTB-075	75mm	93mm	150	FULL	30.48
W-HTB-100	100mm	119mm	150	FULL	30.48

HOT TAR WAND



A high quality wand hose used in asphalt, tar, & bitumen crack filling applicator and dispensing service. Suitable for hot oil & petroleum based fluid transfer applications. Nitrile tube compound & neoprene flame resistant cover. -30°C to + 177°C.

P/N	ID	OD	WP PSI	ROLL MT
W-HTW-020	20mm	33mm	300	30.48/121
W-HTW-025	25mm	41mm	300	30.48
W-HTW-038	38mm	53mm	300	30.48



Factory fitted hose assemblies complete with high quality connections Ready-2-Go in lengths to suit your requirements. Or contact IHF for custom hoses made to your specific requirements. **R2G**



PETROL BOWSER



Flexsteel® Futura™ with Futurin™ cover resists cracking and fading, designed to dispense a wide range of fuels, up to E10 and B5, with extreme durability. The wire braid construction provides excellent kink resistance, low computer creep and long service life. AS 2683, UL 330 and CUL approved. -40°C to +60°C.

* Also available with textile reinforcement AS 2683
P/N. PBHT




P/N	ID	OD	WP PSI	ROLL MT
M-FLEX-016	16mm	26mm	50	152.4
M-FLEX-020	20mm	29mm	50	152.4
M-FLEX-025	25mm	38mm	50	152.4
M-PBHT-016	16mm	26mm	50	152.4
M-PBHT-025	25mm	38mm	50	152.4



AIRCRAFT REFUELING



Used in the fueling and defueling of commercial and private aircraft. Resistant to jet fuel and higher aromatic aviation fuels. Also for use on hydrant service. Black Wingprene® (ORS) static dissipating/static conductive synthetic rubber cover. Hose meets EI 1529-7th edition, 2014, ISO 1825:2010/C/OMEGA and N.F.P.A. Bulletin #407 (2017 revision). Meets AS2683 - 2000, Type 2, Grade 2, Kind 2&3. -30°C to +90°C.




P/N	ID	OD	WP PSI	ROLL MT
W-JET-025	25mm	40mm	300	30/60
W-JET-032	32mm	48mm	300	30/60
W-JET-038	38mm	52mm	300	30/60
W-JET-050	50mm	65mm	300	30/60
W-JET-065	65mm	80mm	300	30.48
W-JET-075	75mm	93mm	300	30.48
W-JET-100	100mm	127mm	300	30.48

* Special aviation fittings & clamps also available



BC MARINA BOWSER



Continental® BC Marina is for dispensing gasoline & diesel fuels to pleasure craft and commercial boats at fresh & salt water marinas, compatible with fuels up to E10 and B5. 2 Layers braided synthetic yarn with static wire. Green high visibility non marking cover, this hose is UL 330 and CUL approved. -40°C to +60°C.

P/N	ID	OD	WP PSI	ROLL MT
M-BCM-020	20mm	30mm	50	152.4
M-BCM-025	25mm	38mm	50	152.4



Factory fitted hose assemblies complete with high quality connections Ready-2-Go in lengths to suit your requirements. Contact IHF for pricing.



RUBBER HOSE

CHEMICAL



CHEMONE®




Extremely flexible & lightweight chemical suction & delivery hose ideal for transferring a multitude of industrial & commercial chemicals including acids & alkalis etc. Modified cross-linked polyethylene rubber tube with textile plies reinforcement & double steel wire helix, corrugated cover. Full rolls or cut lengths available. -40°C to +121°C.

* Quality constructed hose



P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-CHEM1-020	20mm	31mm	200	FULL	30
W-CHEM1-025	25mm	37mm	200	FULL	30
W-CHEM1-032	32mm	42mm	200	FULL	30
W-CHEM1-038	38mm	48mm	200	FULL	30
W-CHEM1-050	50mm	62mm	200	FULL	30
W-CHEM1-065	65mm	76mm	200	FULL	30
W-CHEM1-075	75mm	89mm	200	FULL	30
W-CHEM1-100	100mm	115mm	200	FULL	30

Chem One Vs. The Competition

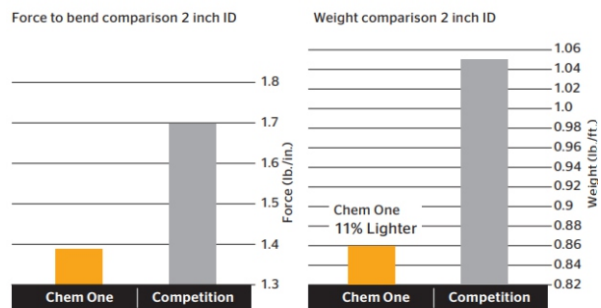

*To assure chemical compatibility, please reference the Continental ContiTech chemical resistance guide.

PUREONE®



Extremely flexible & lightweight universal chemical & food grade suction & delivery hose ideal for transferring a multitude of industrial & commercial chemicals, potable water & high proof alcohol. UHMWPE (Ultra high molecular weight cross-linked polyethylene) tube, textile plies reinforcement & double steel wire helix, corrugated cover. Full rolls or cut lengths available. -40°C to +100°C.

P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-PUR-020	20mm	31mm	200	FULL	30
W-PUR-025	25mm	37mm	200	FULL	30
W-PUR-032	32mm	43mm	200	FULL	30
W-PUR-038	38mm	49mm	200	FULL	30
W-PUR-050	50mm	64mm	200	FULL	30
W-PUR-065	65mm	79mm	200	FULL	30
W-PUR-075	75mm	92mm	200	FULL	30
W-PUR-100	100mm	117mm	200	FULL	30

Quality SS316 couplings & stainless steel crimp ferrules available.



CUSTOM ASSEMBLIES R2G

Hose assemblies made to order for your specific application. Just choose your connection type & material preference or contact us for expert technical advice to suit your fluid transfer requirements.

RUBBER HOSE

MARINE



WET EXHAUST




Premium Wet Exhaust hose for water suction and discharge applications including: engine intake, bilge exhaust, toilet, holding tank and scupper lines. Also for industrial water suction and discharge applications where unique sizes are required to fit over pipe. Nitrile synthetic rubber tube RMA class A (High Oil Resistance) Full rolls or cut lengths. -29°C to +82°C.



P/N	ID	OD	WP PSI	VACUUM	ROLL MT
W-WEH-025	25mm	37mm	150	FULL	20
W-WEH-028	28mm	40mm	150	FULL	20
W-WEH-032	32mm	43mm	150	FULL	20
W-WEH-035	35mm	46mm	125	FULL	20
W-WEH-038	38mm	49mm	100	FULL	20
W-WEH-041	41mm	53mm	100	FULL	20
W-WEH-044	44mm	56mm	100	FULL	20
W-WEH-048	48mm	59mm	100	FULL	20
W-WEH-050	50mm	63mm	75	FULL	20
W-WEH-054	54mm	66mm	75	FULL	20
W-WEH-057	57mm	69mm	75	FULL	20
W-WEH-060	60mm	72mm	75	FULL	20
W-WEH-063	63mm	77mm	75	FULL	20
W-WEH-070	70mm	83mm	50	FULL	20
W-WEH-075	75mm	89mm	50	FULL	20
W-WEH-100	100mm	115mm	50	FULL	20
W-WEH-114	114mm	130mm	30	FULL	20

MARINE FUEL




Premium Continental® hose for marine fuel lines ideal for commercial/recreational watercraft & other applications requiring low permeation rates. Compatible with unleaded, diesel, gasoline blends of ethanol & sour gas. Meets U.S. Coast Guard and international marine certification institute requirements for type A1 service. -18°C to +46°C.

USCG/SAE J1527 TYPE A1 ISO 7840-A1 CE.

P/N	ID	OD	WP PSI	ROLL MT
M-MFL-006	6mm	17mm	50	61
M-MFL-008	8mm	18mm	50	61
M-MFL-010	10mm	20mm	50	61
M-MFL-012	12mm	23mm	36	152
M-MFL-016	16mm	26mm	36	61



Marine fuel fill hose also available in sizes: 3/4", 1", 1 1/2", & 2"



* Stainless steel clamps for marine applications available in Worm Drive & HD Bolt type.

RUBBER HOSE

PUSH LOCK



PUSH LOCK



For use with push-on fittings at working pressures of 300 psi. For low-pressure hydraulic and pneumatic systems such as shop air systems, general industrial, maintenance and automotive assembly applications. Non-conductive, minimum electrical resistance, greater than one (1) megohm per inch of hose length at 1000 Volts DC.

MSHA approved. -40°C to +99°C.

* Also available in coloured cover options POA:



P/N	ID	OD	WP PSI	ROLL MT
M-POH-006	6mm	14mm	300	152.4
M-POH-008	8mm	16mm	300	152.4
M-POH-010	10mm	18mm	300	152.4
M-POH-012	12mm	21mm	300	152.4
M-POH-016	16mm	24mm	300	152.4
M-POH-020	19mm	27mm	300	152.4


* High temperature version also available +135°C, POA.

PUSH-LOCK FITTINGS

A range of specially designed Push-Lock fittings that can be attached to the hose conveniently in the work shop or out in the field. No clamps or ferrules required, the barb design & special hose construction enables the fitting to hold under pressure. Available in plated steel or brass material.



CUSTOM ASSEMBLIES

Hose assemblies made to order for your specific application. Just choose your connection type & material preference or contact us for expert technical advice to suit your fluid transfer requirements. 



READY  GO

RUBBER HOSE

CHEMICAL



NR SPRAY



Premium quality, all-purpose hose for handling a variety of applications such as paint spray or agricultural spray. Will handle spraying paints, automotive finish paints, lacquers, thinners, turpentine, air, oil and a large variety of solvents and chemicals. Silicon free nylon tube. Full rolls or cut lengths available. -18°C to +88°C.

P/N	ID	OD	WP PSI	ROLL MT
M-NRP-006	6mm	12mm	750	152.4
M-NRP-010	10mm	18mm	750	152.4
M-NRP-012	12mm	22mm	750	152.4
M-NRP-020	20mm	30mm	750	152.4
M-NRP-025	25mm	38mm	750	152.4



DEF / ADBLUE® DISPENSING



Diesel Exhaust Fluid (DEF: aqueous 32.5% nitrogen solution of high-purity urea in deionized water) is a key component of selective catalytic reduction (SCR) systems, which help diesel vehicles meet stringent emission regulations. DEF is a liquid reducing agent that reacts with engine exhaust in the presence of a catalyst to convert smog-forming nitrogen oxides (NOx) into harmless nitrogen and water vapor. Continental DEF dispensing hose is specifically designed to convey the high-purity, aqueous urea solution DEF. Hose tube compound is specially Formulated with low extraction EPDM and peroxide cured to provide superior extraction levels to significantly reduce contamination. Flexible & lightweight for standard dispensing and reeling applications. Full Rolls or cut lengths available. -40°C to +60°C.

P/N	ID	OD	WP PSI	ROLL MT
M-DEF-012	12mm	23mm	250	152.4
M-DEF-020	20mm	29mm	250	152.4
M-DEF-025	25mm	37mm	250	152.4



READY **2** GO

RUBBER HOSE

AUTOMOTIVE



FUEL LINE 30R6



Economical SAE J30R6 Fuel hose is ideal for industrial engines, plant, equipment, vehicle and other applications requiring petroleum and diesel fuel transfer. Roll lengths options available. -40°C to +99°C.

* 30 MT Carton Pack




P/N	ID	OD	WP PSI	ROLL MT
M-FL30R6-005	5mm	mm	50	7/30
M-FL30R6-006	6mm	mm	50	7/30/100
M-FL30R6-008	8mm	mm	50	7/30/100
M-FL30R6-010	10mm	mm	50	7/30/100
M-FL30R6-012	12mm	mm	35	7/30

* Convenient merchandiser 7m plastic spoos



FUEL LINE 30R7



Premium Continental® SAE J30R7 fuel hose is ideal for industrial engines, plant, equipment, vehicle and other applications requiring unleaded petrol, diesel fuel, gasoline blends of ethanol (E-10), E85 and sour gas fuel transfer. Roll lengths options available. -40°C to +125°C.



* 152 MT Bulk Reel

P/N	ID	OD	WP PSI	ROLL MT
M-FL30R7-003	3mm	mm	50	15
M-FL30R7-005	5mm	mm	50	7/152
M-FL30R7-006	6mm	mm	50	7/152
M-FL30R7-008	8mm	mm	50	7/152
M-FL30R7-010	10mm	mm	50	7/152
M-FL30R7-011	11mm	mm	50	7
M-FL30R7-012	12mm	mm	35	15/152
M-FL30R7-016	16mm	mm	35	15
M-FL30R7-020	19mm	mm	35	15

OTHER FUEL HOSES AVAILABLE

- * FUEL INJECTION HOSE
- * SUBMERSIBLE FUEL HOSE
- * FUEL VAPOUR EMISSION HOSE
- * FUEL FILL HOSE



FUEL HOSE MERCHANDISER

- 1 Top Cabinet can be placed on a counter, wall or attached to the lower hose rack.
- 2 Comes stenciled with part numbers for the nine Most popular hoses. Labels included to change Part numbers as required.
- 3 The lower hose rack holds three sizes of the most Popular heater hose sizes and provides the base For the top cabinet.



RUBBER HOSE

AUTOMOTIVE



HEATER HOSE




Economical heater hose EPDM rubber compound for vehicle cooling / heating systems . Roll length options available. -40°C to +100°C.

P/N	ID	OD	WP PSI	ROLL MT
M-HHE-008	8mm	14mm	60	30
M-HHE-010	10mm	16mm	60	25
M-HHE-012	12mm	19mm	60	15/100
M-HHE-016	16mm	23mm	60	15/50/100
M-HHE-020	20mm	26mm	50	15



BLACK HEATER HOSE



Premium Continental® EPDM SAE 20R3 Class D2 specifications, designed for heater hose applications where resistance to antifreeze coolants and engine bay temperatures is required. Roll lengths options available. -40°C to +125°C.


P/N	ID	OD	WP PSI	ROLL MT
M-HHC-010	10mm	16mm	100	15
M-HHC-012	12mm	19mm	100	15/152
M-HHC-016	16mm	23mm	100	15/152
M-HHC-020	20mm	26mm	50	15/152
M-HHC-025	25mm	31mm	50	15/137



* 152 MT Bulk Reel



XTREME HEATER HOSE



Premium Continental EPDM SAE 20R3 Class D3 HT EC specifications, designed for heater hose applications that are exposed to higher engine bay temperatures and require a higher heat resistance. Designed for applications with resistance to antifreeze coolants. Roll lengths options available. -40°C to +150°C.

P/N	ID	OD	WP PSI	ROLL MT
M-HHCX-008	8mm	14mm	60	15
M-HHCX-010	10mm	16mm	60	15
M-HHCX-012	12mm	19mm	60	15/76
M-HHCX-016	16mm	23mm	60	15/76
M-HHCX-020	20mm	26mm	60	15/76
M-HHCX-025	25mm	31mm	45	15

* Also available in silicone to +177°C.



Silicone Heater Hose

Silicone Heater Hose is used for coolant transfer applications and higher-temperature service.





STRAIGHT RADIATOR HOSE

- ECONOMY:** Economy moulded hose with temp. to +120°C
- OIL RESISTANT:** Economy moulded hose with oil resistance properties with temp. to +120°C
- STANDARD:** Continental® premium wrapped hose with temp. to +120°C
- XTREME:** Continental® premium wrapped blue hose with higher temp. to +149°C



ID (")	ECONOMY	OIL RESISTANT	STANDARD	XTREME
1/2	-	-	W-542-956008	-
5/8	W-RAD-016	M-RAD-016	-	-
3/4	-	-	W-542-956012	-
7/8	W-RAD-022	M-RAD-022	W-542-956014	W-XRAD-022
1"	W-RAD-025	M-RAD-025	W-542-956016	W-XRAD-025
1-1/8	W-RAD-028	M-RAD-029	W-542-956018	W-XRAD-029
1-1/4	W-RAD-032	M-RAD-032	W-542-956020	W-XRAD-032
1-1/3	-	-	W-542-956021	-
1-3/8	W-RAD-035	M-RAD-035	W-542-956022	W-XRAD-035
1-1/2	W-RAD-038	M-RAD-038	W-542-956024	W-XRAD-038
1-5/8	W-RAD-041	M-RAD-041	W-542-956026	W-XRAD-041
1-3/4	W-RAD-044	M-RAD—44	W-542-956028	W-XRAD-044
1-7/8	-	-	W-542-956030	W-XRAD-048
2"	W-RAD-050	M-RAD-050	W-542-956032	W-XRAD-050
2-1/8	W-RAD-054	M-RAD-054	W-542-956034	W-XRAD-054
2-1/4	W-RAD-057	M-RAD-057	W-542-956036	W-XRAD-057
2-3/8	W-RAD-060	M-RAD-060	W-542-956038	W-XRAD-060
2-1/2	W-RAD-063	M-RAD-063	W-542-956040	W-XRAD-064
2-5/8	-	-	W-542-956042	W-XRAD-067
2-3/4	W-RAD-070	M-RAD-070	W-542-956044	W-XRAD-070
2-7/8	-	-	W-542-956046	W-XRAD-073
3"	W-RAD-076	M-RAD-076	W-542-956048	W-XRAD-076
3-1/4	W-RAD-083	M-RAD-083	W-542-956052	W-XRAD-083
3-1/2	W-RAD-089	M-RAD-089	W-542-956056	W-XRAD-089
3-3/4	-	-	W-542-956060	W-XRAD-095
4"	-	-	W-542-956064	W-XRAD-102
4-1/2	-	-	-	W-XRAD-114
5"	-	-	-	W-XRAD-127

RUBBER HOSE

AUTOMOTIVE



AIR BRAKE HOSE




Premium Continental® rubber hose for compressed air brake systems on trucks and buses. Reinforced with braided synthetic cord for high-performance strength. Built to SAE specifications SAE J1402 and DOT FMVSS-106. Tube and cover resist oil. Roll length options available. -40°C to +100°C.

P/N	ID	OD	WP PSI	ROLL MT
M-ABH-010	10mm	19mm	225	76/152
M-ABH-012	12mm	23mm	225	76/152



POWER BRAKE VACUUM



Premium Continental® heavy wall construction power brake vacuum hose designed to fit most brake systems on trucks, trailers and construction equipment with resistance to collapsing. Meets or exceeds the requirements of SAEJ1403 Type H and DOT FMVSS-106VH. -40°C to +125°C.

P/N	ID	OD	WP PSI	ROLL MT
M-PBV-010	10mm	20mm	350	15
M-PBV-012	12mm	24mm	350	15/152
M-PBV-020	19mm	30mm	350	15/152



SAE100R5 / J1402



Premium Continental® Desert® DR5 Hi-Temp for heavy duty applications on trucks, trailers, earthmoving & construction equipment. Meets or exceeds the requirements of: SAE100 R5, J1402, & DOT FMVSS-106. Hyd: -40°C to +150°C, Air: -40°C to +93°C.

P/N	ID	OD	WP PSI	ROLL MT
HY-DR5-04	5mm	13mm	3000	76
HY-DR5-05	6mm	15mm	3000	76
HY-DR5-06	8mm	17mm	2250	76
HY-DR5-08	10mm	20mm	2000	76
HY-DR5-10	12mm	23mm	1750	76
HY-DR5-12	16mm	27mm	1500	76
HY-DR5-16	22mm	31mm	800	61
HY-DR5-20	29mm	38mm	625	15

ASSOCIATED PRODUCTS

- TRUCK SUZI COILS SETS
- NYLON AIR BRAKE TUBE J844 B
- QUICK COUPLERS & FITTINGS
- HOSE CLAMPS & HOSE BARBS
- REPAIR KITS



RUBBER HOSE

AUTOMOTIVE



TRANSMISSION OIL COOLER



Premium Continental® rubber hose designed for use in connecting transmission oil coolers for auto and light truck applications. -40°C to +121°C.



P/N	ID	OD	WP PSI	ROLL MT
M-TOC-008	8mm	16mm	250	7.6/30
M-TOC-010	10mm	18mm	250	7.6/30
M-TOC-012	12mm	22mm	250	7.6

WASHER / VACUUM TUBE




Premium Continental® EPDM tubing designed to be used on windshield wiper systems, windshield washer fluid tanks, wet arm wiper tubing, radiator overflow tanks and as vacuum tubing. SAE J1037. -40°C to +125°C.



P/N	ID METRIC	ID IMPERIAL	WP PSI	ROLL MT
M-WWT-2.4	2.4mm	3/32"	50	15
M-WWT-2.8	2.8mm	7/64"	50	15
M-WWT-3.1	3.1mm	1/8"	50	15
M-WWT-3.9	3.9mm	5/32"	50	15
M-WWT-4.4	4.4mm	11/64"	50	15
M-WWT-5.6	5.6mm	7/32"	50	15
M-WWT-6.3	6.3mm	1/4"	50	15
M-WWT-7.1	7.1mm	9/32"	50	15
M-WWT-7.9	7.9mm	5/16"	50	15
M-WWT-9.5	9.5mm	3/8"	50	15

FUEL EMISSION / VACUUM




Premium Continental® NBR multipurpose fuel hose / tube that can be used as a fuel line, PCV connection, emission control line or fuel return line. -40°C to +125°C.



P/N	ID METRIC	ID IMPERIAL	WP PSI	ROLL MT
M-FEV-5.6	5.6mm	7/32"	50	7.6
M-FEV-7.9	7.9mm	5/16"	50	7.6
M-FEV-9.5	9.5mm	3/8"	50	7.6
M-FEV-12.7	12.7mm	1/2"	50	7.6

POWER STEERING RETURN



Premium Continental hose designed for use on the return side of automotive and truck power steering systems where resistance to power steering fluid is critical. -40°C to +121°C.



P/N	ID	OD	WP PSI	ROLL MT
M-PSR-008	8mm	16mm	250	7.6
M-PSR-010	10mm	18mm	250	7.6/30

COMPOSITE HOSE



CODE 1000 - PETROLEUM



Composite light weight hose designed for the transfer of petrol, diesel and low viscosity oils & petroleum based products. Full rolls or assemblies available. Galvanized steel inner and outer wires. Complies with AS2683 & EN13765. -20°C to +80°C.

*Also available in lightweight version Code **1003**



P/N	ID	OD	WP PSI	ROLL MT
C-1000-025	25mm	32mm	100	20
C-1000-038	38mm	50mm	100	20
C-1000-050	50mm	62mm	100	20
C-1000-065	65mm	78mm	100	20
C-1000-075	75mm	89mm	100	20
C-1000-100	102mm	114mm	100	20
C-1000-150	150mm	168mm	100	10

CODE 901 - OIL



Composite high strength oil and petroleum transfer hose for loading and unloading, road tanker bottom loading, lubricating oil plant hose exchanges. Full Rolls or assemblies available. -30°C to +80°C.

P/N	ID	OD	WP PSI	ROLL MT
C-901-025	25mm	38mm	150	20
C-901-038	38mm	52mm	150	20
C-901-050	50mm	64mm	150	20
C-901-065	65mm	80mm	150	20
C-901-075	75mm	92mm	150	20
C-901-100	102mm	115mm	150	20
C-901-150	150mm	170mm	150	10
C-901-200	200mm	230mm	150	10


CODE 969 - CHEMICAL



Composite high strength chemical hose typically used in applications involving plant transfer of liquid chemicals, acids & alkalines as well as vegetable & mineral oils loading / unloading from, road tankers, rail tankers and marine tankers. Full rolls or assemblies available. -30°C to +80°C.

P/N	ID	OD	WP PSI	ROLL MT
C-969-025	25mm	38mm	150	20
C-969-038	38mm	52mm	150	20
C-969-050	50mm	64mm	150	20
C-969-065	65mm	80mm	150	20
C-969-075	75mm	92mm	150	20
C-969-100	102mm	120mm	150	20
C-969-150	150mm	174mm	150	10
C-969-200	200mm	230mm	150	10

*Also available in poly coated wire version Code **951**

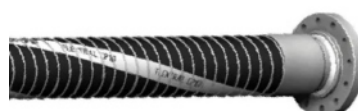


ASSEMBLIES

Custom made assemblies





INSERTION RUBBER

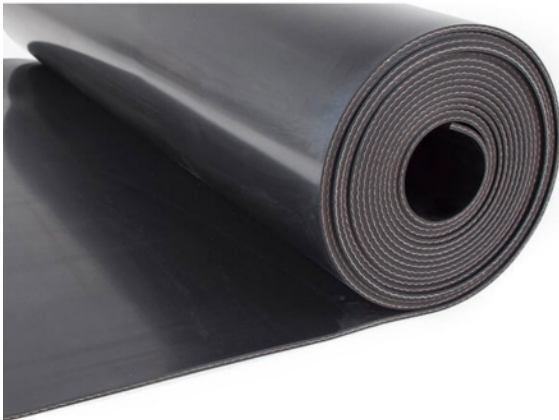

Black natural insertion rubber 60 Duro blended natural and synthetic rubber sheet, reinforced with cotton fabric for improved tear resistance and dimensional stability.

Good physical properties such as mechanical strength and tear strength and has moderate abrasion resistance making it suitable for general insulating or isolating and gasket sealing applications, as a flexible strip, pad, lining or gaskets. Used for sealing, insulating, isolating and protecting steel or other surfaces. Its properties make it suitable for use in a wide range of applications.

P/N	THICKNESS	WIDTH	PLY	ROLL
SR-IN1.5	1.6mm	1200mm	1	10M
SR-IN3	3.5mm	1200mm	1	10M
SR-IN31500	3.5mm	1500mm	1	10M
SR-IN32000	3.2mm	2000mm	1	10M
SR-IN3-2PLY	3.2mm	1200mm	2	10M
SR-IN5	4.8mm	1200mm	2	10M
SR-IN6	6.4mm	1200mm	2	10M
SR-IN61500	6.4mm	1500mm	2	10M
SR-IN9	9.5mm	1200mm	2	10M
SR-IN12	12.7mm	1200mm	2	10M



TECHNICAL SPECIFICATION

Compound: NR/SBR
 Reinforcement: Cotton
 Elongation: ≥350%
 Tensile Strength: ≥ 7 MPA
 Hardness: 65 ±5 shore A
 Abrasion: 300 mm³ (max) @ 10N
 Temperature: -25°C to +70°C

INSERTION RUBBER NYLON



Black natural insertion rubber nylon reinforced, is a black, superior grade, 60 Duro blended natural synthetic rubber sheet, reinforced with a tear resistant nylon monofilament fabric. The specially designed nylon monofilament fabric reinforcement will not allow fluid penetration and gives natural insertion improved tear strength and dimensional stability, making natural insertion specifically suitable for gasket sealing applications.

P/N	THICKNESS	WIDTH	PLY	ROLL
SR-INPN3	3mm	1200mm	1 PN250	10M
SR-INPN6	6mm	1200mm	1 PN250	10M



TECHNICAL SPECIFICATION

Compound: NR/SBR
 Reinforcement: Nylon Monofilament
 Elongation: ≥350%
 Tensile Strength: ≥ 7 MPA
 Hardness: 65 ±5 shore A
 Abrasion: 300 mm³ (max) @ 10N
 Temperature: -25°C to +70°C



HOSE & PIPES

For Assistance please contact Michael: 0488 917 285 or
michael@irrigationdirect.com.au

